

ALPS E3

Commercial LED Lighting

Back-Lit Panel | 1x4, 2x2, 2x4

The ALPS E3 series is a backlit flat panel product designed with optimal LED placement to ensure a uniformly lit space. It features a switchable CCT and power driver that allows endless flexibility at the install site. The average 125 LPW performance also makes the ALPS an ideal solution.

Applications: Commercial Office Spaces | Healthcare | Schools | Retail Merchandising Areas.



DYNAMIC MENU

Ordering Guide [Page 2](#)

Dimensions [Page 3](#)

Controls [Page 5](#)

Photometric Data [Page 6](#)


[Install Instructions](#)

SPECIFICATIONS

Input Voltage	120-277/347V	
Power Factor	0.9	
Total Harmonic Distortion	<20%	
Dimming	0-10V 1% DIM	
CRI	80 CRI	
CCT	35K 40K 50K	
Lumens Per Watt	~125LPW	
Power	1x4	25/30/40W
	2x2	25/30/40W
	2x4	40/50/60W
Ambient Temperature Range	-20°C to 45°C	
Distribution	120°	
Mounting options page 4	Surface Mount Suspended Recessed Gypsum Recessed T-grid	

eralux®

	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				

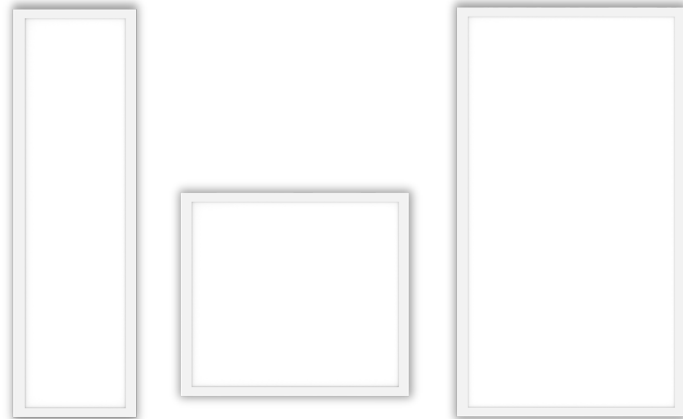

PRODUCT FEATURES



PRODUCT CERTIFICATIONS



Design Lights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified" [page 8](#)

SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 50,000 hours

Rated for 70% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

ORDERING GUIDE

AE-RC-APB	-XXW			-H-03	
AE-RC-APB ERALUX ALPS E3 Commercial Back-lit Flat Panel	-XXW Power switchable 3500/4000/5000K selectable	14 1x4' 25/30/40W 3,125/3,750/5,000lm 22 2x2' 25/30/40W 3,125/3,750/5,000lm 24 2x4' 40/50/60W 5,000/6,250/7,500lm	-28CDM 0-10V Dimming -28CDS Bi-Level PIR Motion Sensor	-H-03 120- 277/347V	[Blank] Down to 10% -1DIM ¹ Down to 1%

Fixture Family	Power CCT	Size	Controls	Voltage	Dimming
----------------	-------------	------	----------	---------	---------

NOTES 1. 1DIM not available with Motion Sensor

ORDERING GUIDE - ACCESSORIES

AE-RC-M ERALUX Commercial Mounting Options	BGYPK Gypsum Kit SMK- Surface Mount Kit-3" thickness	1X4 1x4' 2X2 2x2' 2X4 2x4'	AE-RC-MB ERALUX Commercial Mounting Options	-HK ¹ Suspension kit
---	---	---	--	------------------------------------


Fixture Family	Mounting Option	Size	Fixture Family	Mounting Option
----------------	-----------------	------	----------------	-----------------

NOTES 1. For more aesthetic look suspension and surface mount kit can be ordered together


[BLANK] No EMBB BLD-HM8D-YYY 8W emergency battery backup EMBB
--

DIMENSIONS


AE-RC-APB-XXW14

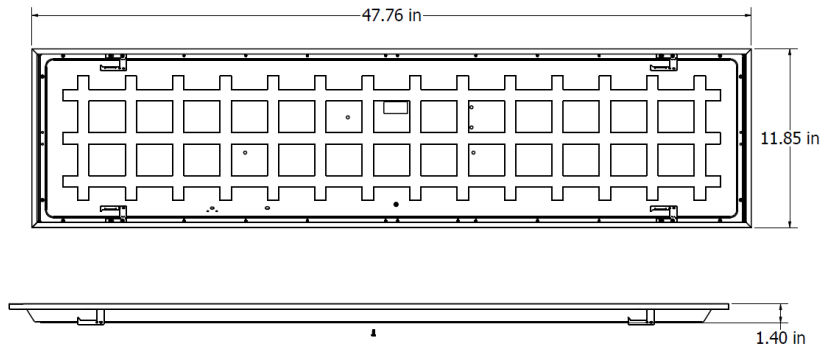

AE-RC-APB-XXW22

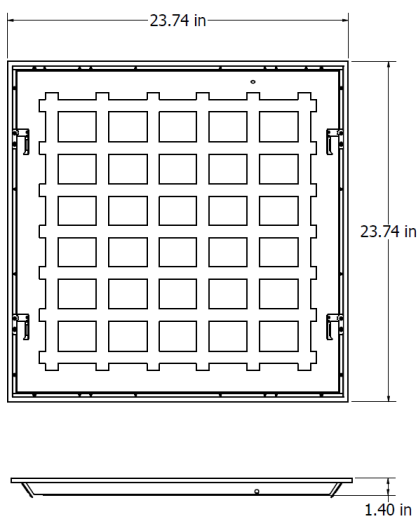

AE-RC-APB-XXW24

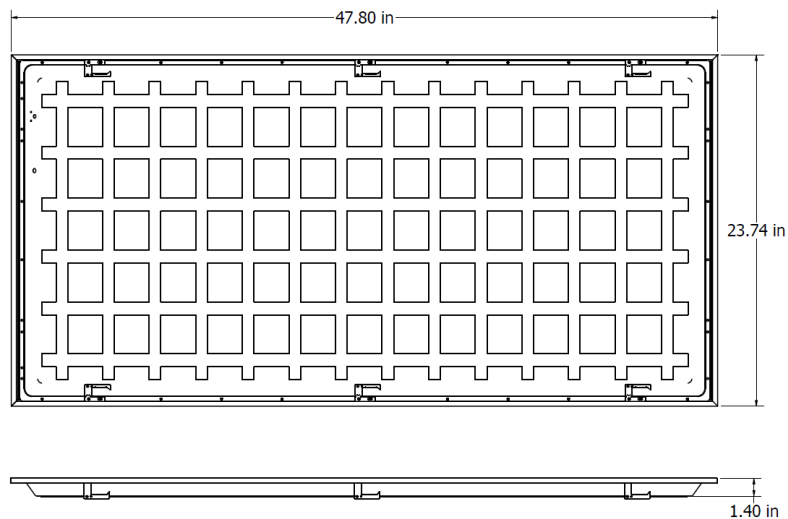

MOUNTING ACCESSORIES


Ordered separately, field installed

GYPSUM KIT

Recessed Gypsum



ORDERING CODE	DIMENSIONS			Cut out	
	LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH
AE-RC-MBGYPK1X4	49.1"	13.3"	1.5"	48.3" - 48.7"	12.5" - 12.9"
AE-RC-MBGYPK2X2	25.1"	25.1"	1.5"	24.3" - 24.7"	24.3" - 24.7"
AE-RC-MBGYPK2X4	49.1"	25.1"	1.5"	48.3" - 48.7"	24.3" - 24.7"

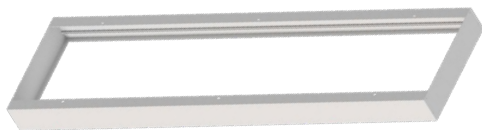SURFACE MOUNT KIT

ORDERING CODE	DIMENSIONS		
	LENGTH	WIDTH	HEIGHT
AE-RC-MSMK-1X4	48"	12.2"	2.91"
AE-RC-MSMK-2X2	24"	24"	2.91"
AE-RC-MSMK-2X4	48"	24"	2.91"

SUSEPENSION KIT

ORDERING CODE	QUANTITY	DESCRIPTION	LENGTH
AE-RC-MB-HK	3 pieces/set	Aircraft cable	4'



CONTROLS

Bi-Level PIR Motion Sensor - IFS06R
AE-RC-APB-XXWXX-28CDS
(Comes with fixture)





The IFS06R is a compact PIR (Passive Infrared) sensor that combines motion detection with daylight control. It works with 0-10V dimming LED drivers to enable automatic lighting, turning fixtures on and off based on occupancy and available daylight. The built-in photocell allows for dusk-to-dawn operation, keeping lights on overnight even without motion. In daylight harvesting mode, it automatically adjusts lighting to maintain the perfect balance with natural light. It's ideal for low-profile fixtures and supports simple push-button connections.

SPECIFICATIONS	
Input Voltage	12V DC
IP Rated	IP20
Mounting Height	23 Feet max
	7 Meters
Detection Range	10 Meters
	32 Feet
Standby Power	<0.5W
Operating Temperature	-30°C to 55°C
Installation	Fixture integrated

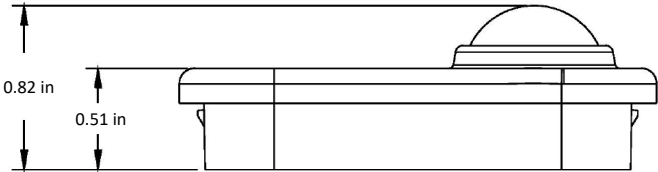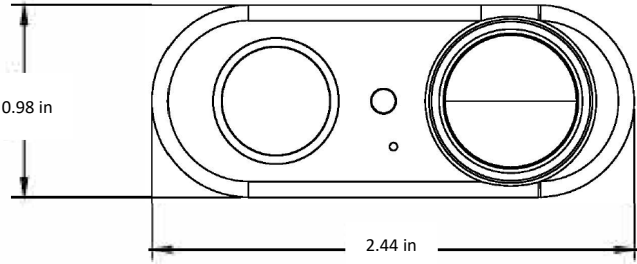

Microwave motion sensor coverage

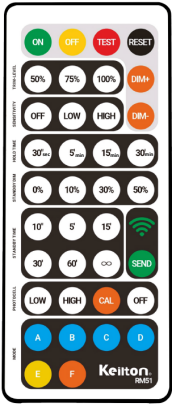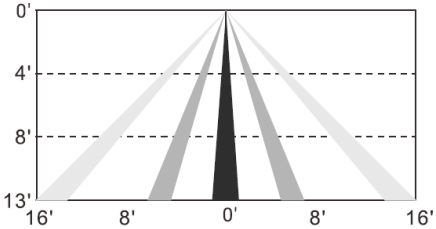

Remote control:
AE-SF-JB-MOTIONSENSOR-RMT
Comes with 6 default modes with different options:

- Trim-level (Dimming % when turned on)
- Sensitivity (Sensor sensitivity to movement)
- Hold time (Time before the fixture goes to standby mode)
- Standby dim percentage (Dimming % when no movement)
- Standby time (Time before the fixture turns off after standby)
- Photocell (Sensitivity for the lumens adjustment to natural light)

CONTROLS

Ordered separately, field installed


EMERGENCY LED DRIVER (BLD-HMXXD-YYY)

BLD-HM8D-YYY

BLD-HM25D-YYY




The BLD-HMXXD-YYY series LED Emergency Driver is UL listed for field and factory installations. It switches to emergency mode during power failures, providing up to 90 minutes of lighting. With an integrated battery, charger, and converter, it delivers 6-25W constant power at 170VDC. Ideal for 0-10V dimmable indoor commercial LED fixtures, such as flat panels, troffers, downlights, and linear strip lights.

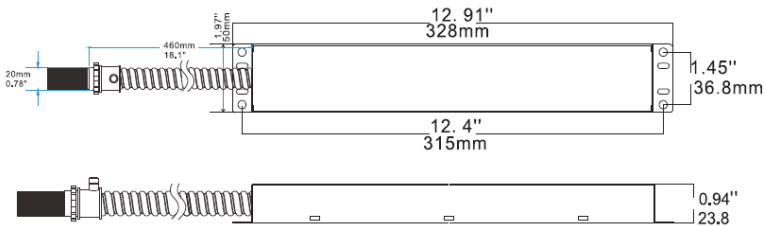

ROOM OCCUPANCY SENSOR

PART NUMBER	DESCRIPTION
AE-CT-DT806	Detecta - Room Occupancy Sensor
RC102	RC102 Remote Control

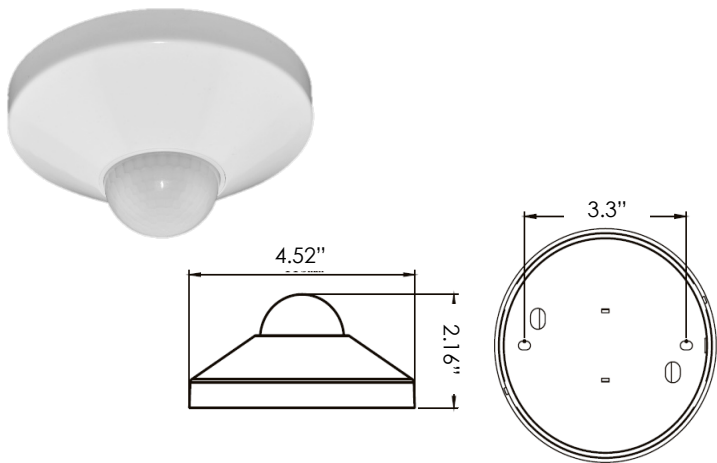

SPECIFICATIONS	
Input Voltage	100-347 Vac
Power Frequency	50/60HZ
Input Power	8W max
Output Voltage	170V Dc
Output Power	8W
Ambient Temperature	0°C to 50°C 30°F to 122°F
Installation	Remote

SPECIFICATIONS		
Input Voltage	120-277 Vac	
Power Frequency	50/60HZ	
Rated Load	At 120 Vac	800W
	At 277 Vac	1200W
Detection Range	3-10 Meters	
	9.8- 32.8 Feet	
Standby Power	~0.9W	
Time Setting	10 sec to 30 min	
Light Control	10-2,000LUX	
Installation	Ceiling Mounted	


LUMEN ESTIMATE


Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:


LUMEN ESTIMATE ADJUSTMENT FACTORS

CCT	3500K	4000K	5000K
80CRI	0.97	1.00	1.03

PHOTOMETRIC DATA

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
AE-RC-APB-XXW14-28CDM-H-03		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc		Beam Width	
Wattage	40W	0-20°	601.68	12.3		1.7ft	567 fc	5.4 ft	5.3 ft
CCT	3000K	0-30°	1281.47	26.3		3.3ft	151 fc	10.5 ft	10.3 ft
Distribution	120°	0-40°	2107.15	43.2		5.0ft	65.6 fc	15.9 ft	15.6 ft
		0-60°	3763.15	77.1		6.7ft	36.5 fc	21.3 ft	21.0 ft
		0-80°	4748.76	97.4		8.3ft	23.8 fc	26.4 ft	26.0 ft
		0-90°	4864.01	99.7		10.0ft	16.4 fc	31.8 ft	31.3 ft
					■ Vert. Spread: 115.6° ■ Horiz. Spread: 114.8°				

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
AE-RC-APB-XXW22-28CDM-H-03		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc		Beam Width	
Wattage	40W	0-20°	603.89	12.5		1.7ft	569 fc	5.3 ft	5.3 ft
CCT	3000K	0-30°	1285.35	26.6		3.3ft	151 fc	10.3 ft	10.2 ft
Distribution	120°	0-40°	2112.02	43.8		5.0ft	65.8 fc	15.6 ft	15.5 ft
		0-60°	3763.22	78		6.7ft	36.6 fc	20.9 ft	20.8 ft
		0-80°	4715.3	97.7		8.3ft	23.9 fc	25.9 ft	25.7 ft
		0-90°	4814.14	99.7		10.0ft	16.5 fc	31.2 ft	31.0 ft
					■ Vert. Spread: 114.8° ■ Horiz. Spread: 114.3°				

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION				
AE-RC-APB-XXW24-28CDM-H-03		Zone	Lumens	% Fixture	Direct Light		Center Beam Fc		Beam Width	
Wattage	60W	0-20°	879.45	12.5			1.7ft	833 fc	5.3 ft	5.2 ft
CCT	3000K	0-30°	1871.44	26.6			3.3ft	221 fc	10.4 ft	10.2 ft
Distribution	120°	0-40°	3076.38	43.8			5.0ft	96.3 fc	15.7 ft	15.4 ft
		0-60°	5485.85	78			6.7ft	53.7 fc	21.0 ft	20.6 ft
		0-80°	6868	97.7			8.3ft	35 fc	26.1 ft	25.6 ft
		0-90°	7010.58	99.7			10.0ft	24.1 fc	31.4 ft	30.8 ft
					■ Vert. Spread: 115.0° ■ Horiz. Spread: 114.0°					

OVERVIEW



Innovative Design

- Aluminum die-cast frame
- Enhanced quality diffuser ensures high efficiency light output for a clean, evenly illuminated surface



Multiple Selections

- Power switchable.
- Three selectable CCT options.
- 1x4', 2x2' and 2x4' sizes.




Emergency backup battery Motion Sensor




Mounting Options

- Surface Mount
- Gypsum
- Suspended
- Suspended with surface mount kit
- Recessed -T grid

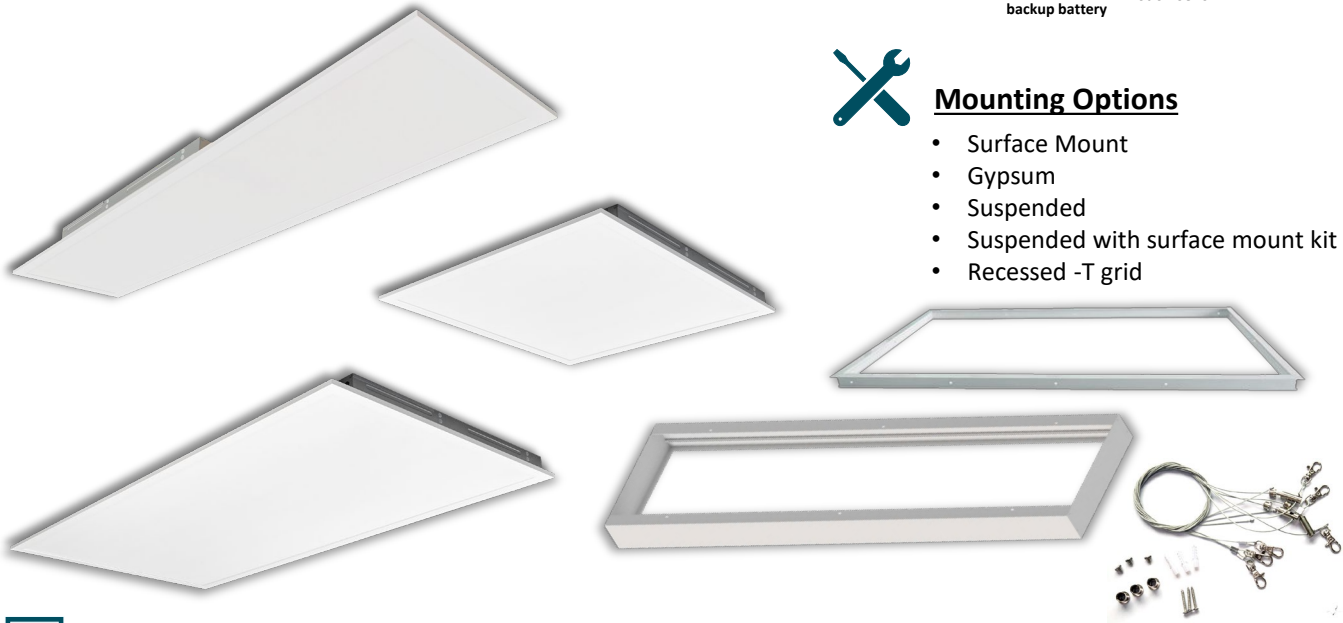

Tests And Certifications

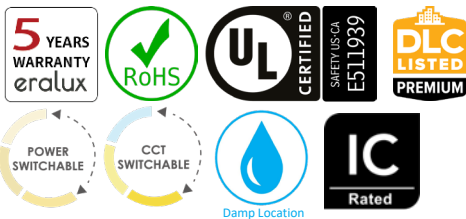

Feature

- Dim down to 1% option

DLC

DLC MODEL	PRODUCT ID	Primary Use	Classification
AE-RC-APB-XXW14-28(CDM,CDS)-H-03	S-0D3X15	1x4 Luminaires for Ambient Lighting of Interior Commercial Space	Premium
AE-RC-APB-XXW22-28(CDM,CDS)-H-03	S-K8X3V1	2x2 Luminaires for Ambient Lighting of Interior Commercial Space	Premium
AE-RC-APB-XXW24-28(CDM,CDS)-H-03	S-TZXYT8	2x4 Luminaires for Ambient Lighting of Interior Commercial Space	Premium