

eralux

12"/15" SURFEACE LED DOWNLIGHT
Installation Guide


⚠ WARNING

- Risk of electrical shock. Disconnect power at fuse or circuit breaker before installing or servicing.
- To prevent early lamp failure, lamp should only be installed in operating environments ranging between (-4°F to 113°F).
- To prevent overheating do not install in totally enclosed recessed fixtures.
- No user serviceable parts inside. To avoid electrical shock do not disassemble product.
- This product is not intended for use in emergency light fixtures or exit signs.
- Covered ceiling mount only.
- Risk of fire or electrical shock. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Installation should be performed only by a qualified electrician

⚠ CAUTION

- Turn power off before inspection, installation or removal.
 - Suitable for use in dry and wet indoor and outdoor locations. Use only on 120 VAC, 60Hz circuits.
- This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digita device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

INSIDE THE BOX

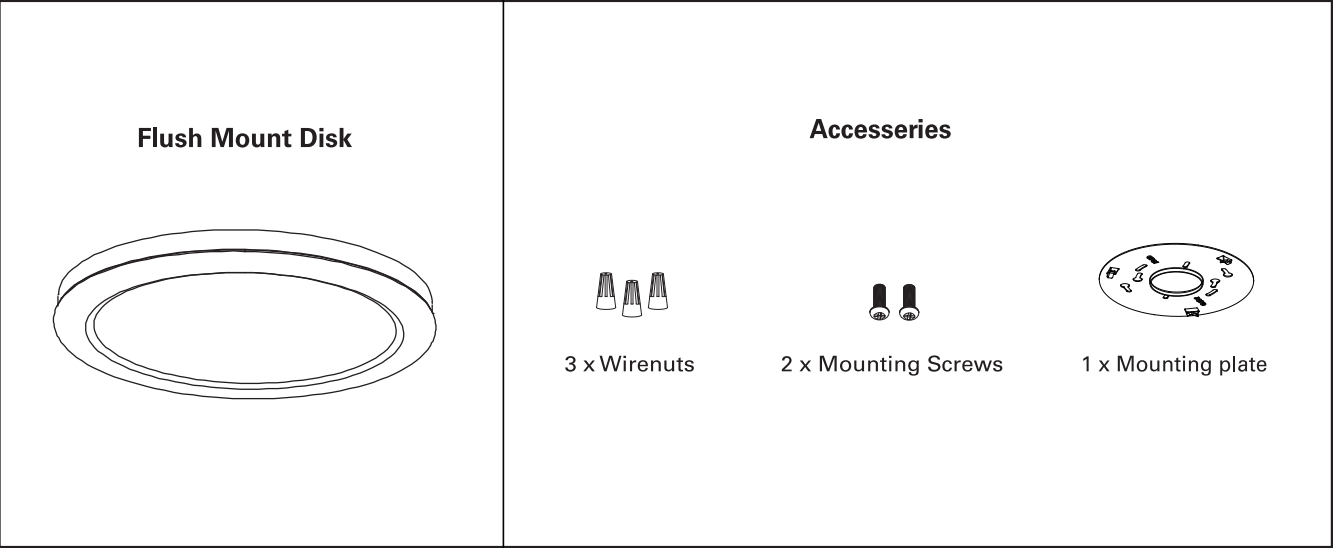


eralux


12"/15" SURFEACE LED DOWNLIGHT
Installation Guide

How to install
Important safety information - read all instructions before installation.


Ceiling Flush Mount

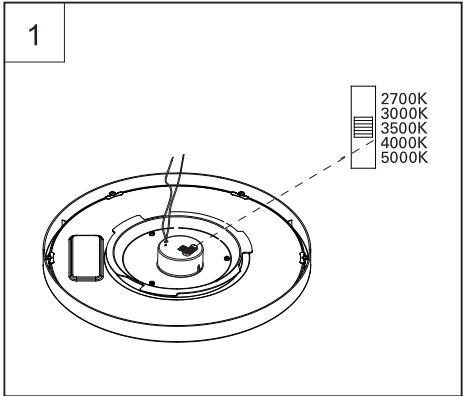


Step 1: Selecting the correlated Color Temperature (CCT).
Before installation, select your preferred CCT by moving the switch to either 2700K, 3000K, 3500K, 4000K, or 5000K

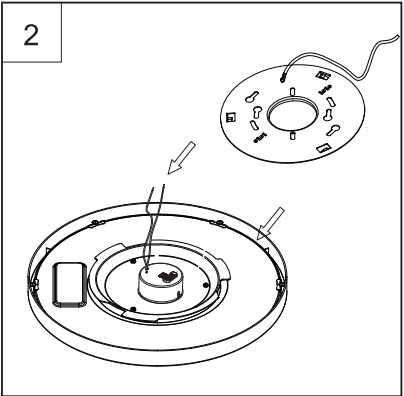


Step 2: Preparing the Mounting Plate.
Choose the mounting plate holes compatible with your junction box.

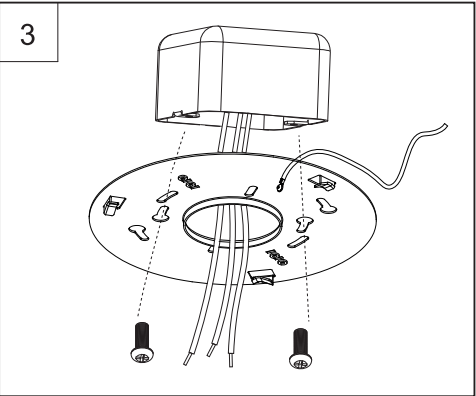

Step 3: Installing the Mounting Plate.
Align the appropriate holes in the mounting plate with the holes in the junction box. Using the screws, attach the mounting plate to the junction box. Tighten the screws until the mounting plate is flush with the ceiling.

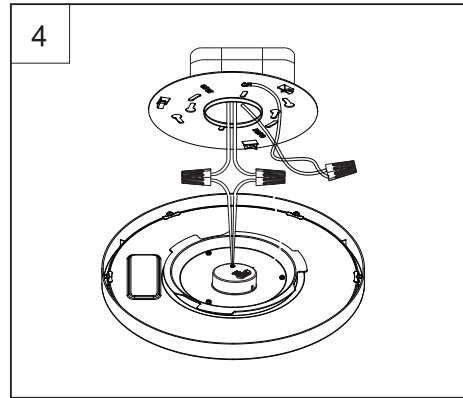

Step 4: Making the Wiring Connections.
Using the included wire nuts (BB), connect the black wire to the hot supply wire, Connect the ground wire (green wire) to the ground wire, and connect the white wire to the supply neutral wire.

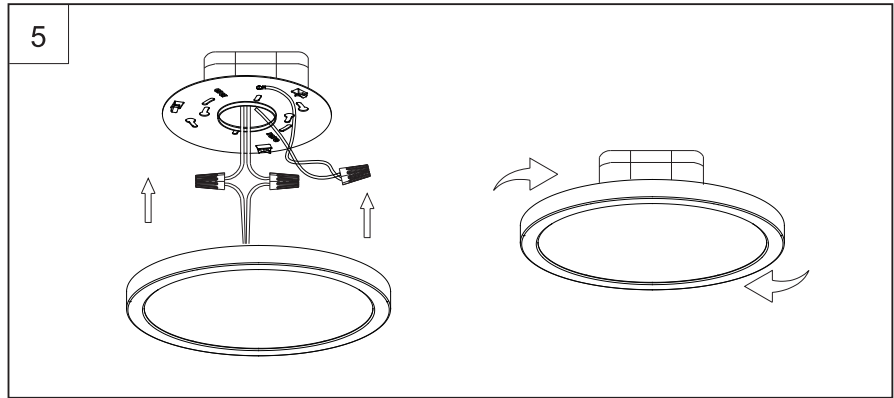

Step 5: Attaching the LED fixture to the Junction Box.
Push the LED fixture into the mounting plate and make sure the LED fixture is fully secured before releasing.

DEXXXX 说明书

尺寸：210x297mm

材质：105g铜板纸

每彩盒配1 P C S

双面印刷 符合R O H S .