

CLARA

DECORATIVE LIGHT

CASA SERIES | Vanity Light

eralux®

DATE

QTY

ACC. QTY

TYPE

PROJECT

PN

ACCESSORY PN

NOTES



DYNAMIC MENU

Order Information

[Page 2](#)



Dimensions

[Page 2](#)

Photometric Data

[Page 3](#)

[Install Instruction link](#)

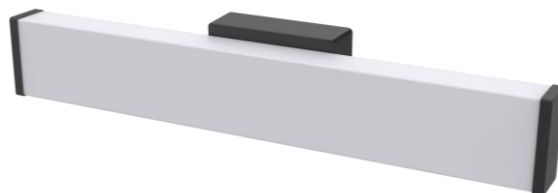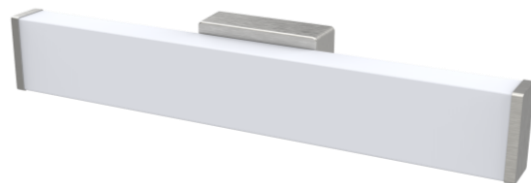

SPECIFICATIONS

Input Voltage	120V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming	TRIAC Dimming 0-10V Dimming
CRI	90 CRI
CCT	27K 30K 35K 40K 50K
Efficacy	~80 lm/w
Length	2'
Power	20W
Ambient Temperature Range	-20°C to 40°C
Mounting Options	Wall mount
Fixture Finish	Black Brushed nickel

Distribution



PRODUCT FEATURES



PRODUCT CERTIFICATIONS



SYSTEM WARRANTY – 3 YEARS

Eralux will warrant defective drivers, LEDs and boards for 3 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 100,000 hours

Rated for 70% initial lumen output at 100,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

DECORATIVE LIGHT
CASA SERIES | Vanity Light



ORDERING GUIDE

CS-CL	-02	-20W		
CS-CL Clara Decorative Vanity Light	-02 2 Ft	-20W 20W 1600 lm CCT Switchable 27/30/35/40/50K	-SV Silver Brushed Nickel -BK Matte Black	[BLANK] Triac Dimming -D 0-10V Dimming

Fixture Family

Length

Power


Finish

DIMENSIONS – FIXTURE AND MOUNTING


VIEW

CS-CL-02-20W


FRONT VIEW

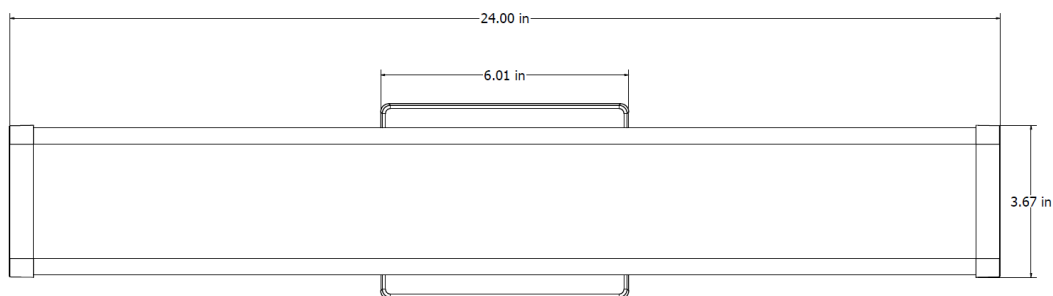

SIDE VIEW



DRILLING
PATTERN
FOR
SURFACE
MOUNT

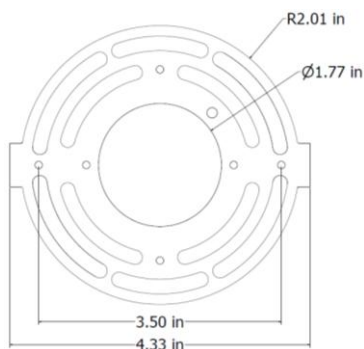


LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS

CCT	3500K	4000K	5000K
PREMIUM (90CRI)	0.97	1	1.03

PHOTOMETRIC DATA

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION		
CS-CL-02-20W		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc	Beam Width	
Wattage	20W	0-20°	171.64	9.5		57 fc	5.0 ft	7.3 ft
CCT	5000K	0-30°	371.16	20.5		14.3 fc	10.0 ft	14.7 ft
Distribution	150°	0-40°	621.21	34.3		6.34 fc	15.0 ft	22.0 ft
Length	2ft	0-60°	1159.66	64.1		3.56 fc	20.0 ft	29.3 ft
		0-80°	1555.05	85.9		2.28 fc	25.0 ft	36.7 ft
		0-90°	1659.95	91.7		1.58 fc	30.0 ft	44.0 ft
						■ Vert. Spread: 90.0° ■ Horiz. Spread: 111.4°		

DIMMER COMPATIBILITY LIST

Brand	Model
Lutron	MACL-153MR-WH
	DVWCL-153PH-WH
	CTCL-153PDH-LA
	TGCL-153P-WH
	SELV-300P-LA
	DVELV-300P-BR
	SLV-600P-LA
	AYCL-153P-WH
	P-PKG1WB-WH
	PD-6WCL
	DVCL-153P-WH
	MACL-153M
	MSCL-OP153M
Leviton	6672-1LW
	6674-P0W
	D26HD-2RW
	6672
Kasa Smart	HS220

OVERVIEW

**Innovative Design**

- Rectangular shape
- Highly durable polycarbonate and high transmittance lens.

**Multiple Options**

- Five CCT switchable
- Matte black & brushed nickel finishes.

**Tests And Certifications****Mounting Available**

- Wall mount

