


CLARITY

Rated 120-277V with 0-10V dimming, CLARITY is a 2ft rectangular vanity light delivering 32W at 80 CRI. Five switchable CCTs (27/30/35/40/50K), a metal housing in brushed nickel and a durable, high transmittance polycarbonate lens.

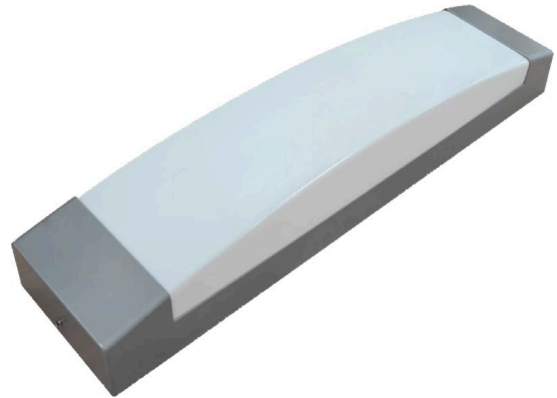

Type: _____ Date: _____

Project: _____

Catalog #: _____

Notes: _____

Key Specifications

Electrical

Input Voltage	120-277V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming	0-10V
Power	32W

Optical

CRI	80 CRI
CCT	Switchable 27/30/35/40/50K
Efficacy	~50lm/W
Distribution	Lambertian 130°

Physical

Length	2ft
Mounting Options	Wall mount
Fixture Finish	Brushed nickel
Ambient Temperature Range	-20°C to 45°C

Certifications

Listings	UL • RoHS
Rating	Damp location

System Warranty

5 years

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

Lumen Maintenance

L70 at 50000h



Rated for 70% initial lumen output at 50000h of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

Ordering Guide - Fixture

Assembled Catalog Number


[RESET](#)

CS-CR


01	FIXTURE FAMILY		CS-CR Clarity Decorative Vanity Light
02	LENGTH		-02 2ft
03	POWER		-32W 32W 1600lm
04	CCT		-5CCT Switchable 27/30/35/40/50K
05	FINISH		-SV Silver Brushed Nickel

Dimensions - Fixture and Mounting

All dimensions in inches. Installation instructions: [Install Instruction link](#)

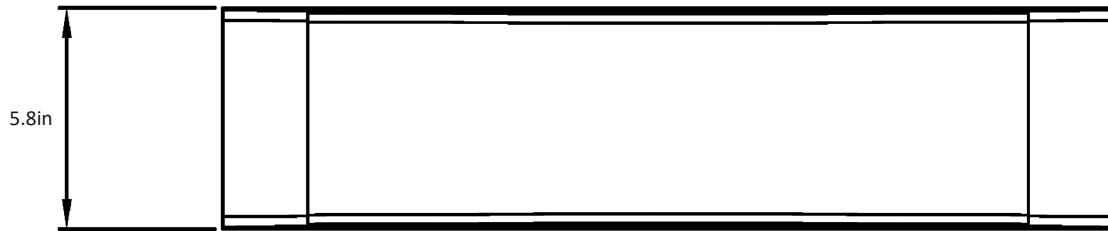

CS-CR-02-32W Front View

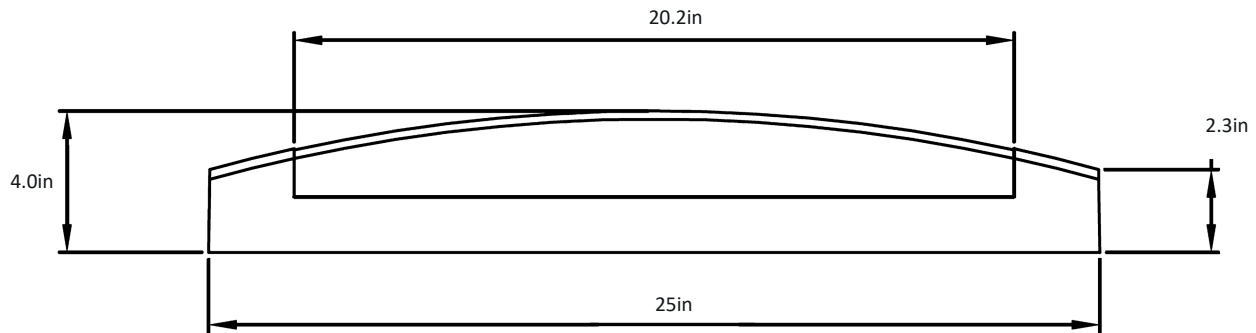


CS-CR-02-32W Top View

Photometric Data

CS-CR-02-32W-

2ft · 32W

		ZONE	LUMENS	% FIXTURE
		0-20°	207.48	9.52
Wattage	32.2W	0-40°	746.05	34.24
CCT	5000K	0-60°	1376.63	63.19
Distribution	124°	0-80°	1812.81	83.21
Length	2ft	0-90°	1918.45	88.06
		0-180°	2178.59	100.00



DISTANCE	CENTER Fc	BEAM WIDTH	
2.5ft	89.1	7.6ft	11.8ft
5.0ft	22.3	15.3ft	23.6ft
7.5ft	9.90	22.9ft	35.4ft
10.0ft	5.57	30.5ft	47.3ft
12.5ft	3.56	38.2ft	59.1ft
15.0ft	2.47	45.8ft	70.9ft
Vert. spread		113.6°	
Horiz. spread		134.1°	