

ELARA

Wall washing straight from the track: an integrated shield gives ELARA, a 9.64in snap-in head for the Jupiter 48V system, its wall wash distribution. 12W delivers 1060lm at 90 CRI, in black or white.

Art Gallery

Show Room


Retail Store

Hospitality



Project Information

Type: Date:
Project:
Catalog #:
Notes:

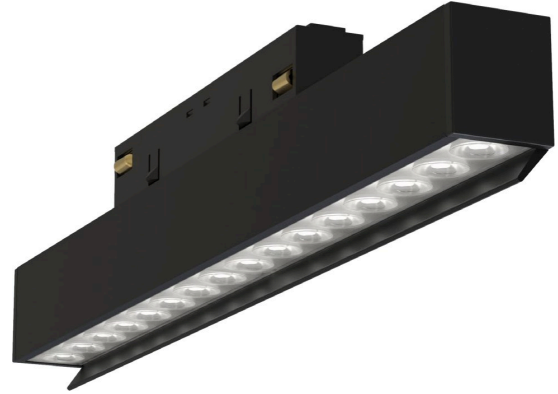

Key Specifications

Electrical

Input voltage	48V DC
Power factor	> 0.9
THD	< 20%
Dimming	0-10V with external driver
Power	12W

Optical

Lumens	1060lm
Efficacy	88lm/W
CRI	90
CCT	3000K · 4000K
Distribution	Wall wash

Physical

Length	9.64in
Mounting	Jupiter snap-in track
Housing	Die-cast aluminum
Finish	Black · White
Accessories	Track · Driver

Certifications

Listings	3-Yr Warranty · ETL · RoHS
Lumen maintenance	L70 at 55000h

System Warranty

3 years

Eralux will warrant defective drivers, LEDs and boards for 3 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

Lumen Maintenance

L70 at 55000h

Rated for 70% initial lumen output at 55000h of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

Ordering Guide - Fixture

Assembled Catalog Number

[RESET](#)

JP-EL

01

FIXTURE FAMILY



JP-EL

ERALUX Elara linear snap-in track head | Jupiter Series

02

POWER

12

W

-12W

12W | 1060lm

03

DISTRIBUTION

WW

-WW

Wall Wash

04

CCT

30

3000K

40

4000K

05

FINISH

-BK

Black

-WH

White

The Elara track head does not come with an integral driver. The ELG-75-48AB driver must be ordered separately. See the Jupiter track spec sheets for more information.

Jupiter Snap-In Track System


Available in 4ft or 8ft lengths. Track, connectors, power feeds and the external driver are ordered from the Jupiter track spec sheets.



ST6

1in depth


Surface or suspended



ST2

2in depth


Surface or suspended



ST8

1in depth

Recessed




ST18

2in depth

Recessed


Dimensions

All dimensions in inches. [Install Instruction link](#)

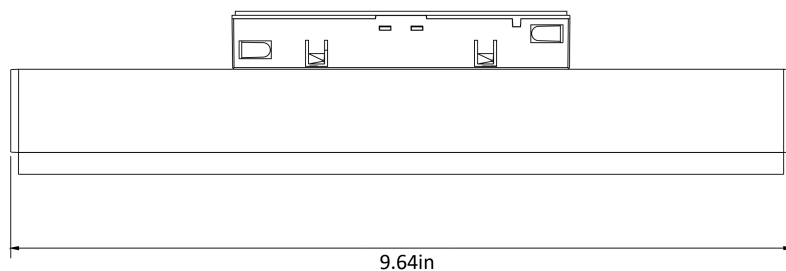

9.64in

Front elevation (left) · end view (right)



0.88in

1.29in

× 1.06

