

EQUATOR SERIES

TRACK LED LIGHT

Cylinder Track Head | 3 Sizes | Adjustable Beam Angle

The EQUATOR is a cylinder track head offers a range of optical options, multiple sizing and beam angles available. Its accessories and mounting options allow for seamless customization. With straight forward installation, adjustments to the lighting can be made quickly and effortlessly on field. It will brighten your space by offering 2450 lumens. Applications: Art Galleries | Show Rooms | Retail Stores | Hospitality



DATE	QTY	ACC. QTY	TYPE
PROJECT			
PN			
ACCESSORY PN			
NOTES			



DYNAMIC MENU


Order Information	Page 2
Dimensions	Page 2
Accessories	Page 3
Photometric Data	Page 4

[Install Instruction link](#)

SPECIFICATIONS

Input Voltage	120V-277V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming Page 3	TRIAC dimming
CRI	90 CRI
CCT	27K 30K 35K 40K 50K
Efficacy	72 lm/W 83 lm/W 79 lm/W
Power	14W 20W 29W
Ambient Temperature Range	-10°C to 35°C
Mounting Adapter	Juno Global Halo Lightolier
Mounting Options	Track System Monopoint
Fixture Finish	Black White

Distribution



PRODUCT FEATURES



PRODUCT CERTIFICATIONS



SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 50,000 hours

Rated for 70% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

TRACK LED LIGHT

Cylinder Track Head | 3 Sizes | Adjustable Beam Angle



ORDERING GUIDE

	12	-VA	P	2750		
TL-EQM ERALUX Equator Mini Track Head 2.4" Aperture 1000lm	12 120V	-VA Variable Distribution 15° to 53°	P Premium 90 CRI	2750 27/30/35/40/50K CCT Switchable	J1 Juno G1 Global H1 Halo L1 Lightolier	BK Black powder coat WH White powder coat
TL-EQ ERALUX Equator Track Head 2.8" Aperture 1660lm		Variable Distribution 19° to 52°				
TL-EQG ERALUX Equator Grande Track Head 3.1" Aperture 2300lm		Variable Distribution 20° to 44°				

Fixture Family	Voltage	Distribution	CRI	CCT	Adapter	Finish
----------------	---------	--------------	-----	-----	---------	--------

NOTE

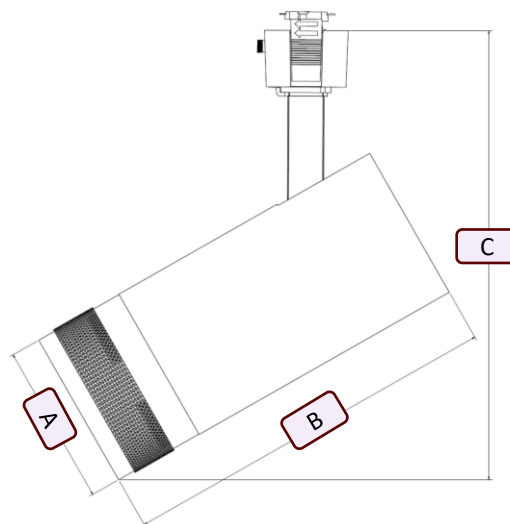
1. Juno and Halo Adapter are compatible with 120V only

DIMENSIONS

TL-EQX12

- Rotation up to 355°

Dimensions			
	TL-EQM12	TL-EQ12	TL-EQG12
A	Ø 2.4 in	Ø 2.8 in	Ø 3.1 in
B	6.28 in	6.66 in	6.89 in
C	7.32 in	7.88 in	8.28 in



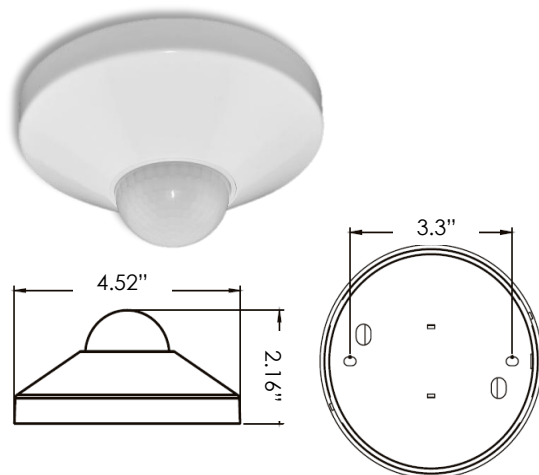
TRACK LED LIGHT

Cylinder Track Head | 3 Sizes | Adjustable Beam Angle

ROOM OCCUPANCY SENSOR

Ordered separately, field installed

PART NUMBER	DESCRIPTION
AE-CT-DT806	Detecta - Room Occupancy Sensor
RC100	RC102 Remote Control



SPECIFICATIONS		
Input Voltage	120-277 Vac	
Power Frequency	50/60HZ	
Rated Load	At 120 Vac	800W
	At 277 Vac	1200W
Detection Range	3-10 Meters	
	9.8-32.75 Feet	
Standby Power	~0.9W	
Time Setting	10 sec to 30 min	
Light Control	10-2,000LUX	
Installation	Ceiling Mounted	

DIMMER COMPATIBILITY LIST

TRIAC/ELV Dimming

Brand	Model
LUTRON	DV-600P
	DVELV-303P
	Lutron S-603P
	Lutron NTLV-600
	Lutron SF-10P
	Lutron S2-L
	Lutron MA-1000
	Lutron S-600P
	Cooper 9530
	Cooper SLC03P
	Lutron LGCL-153P

TRACK LED LIGHT

Cylinder Track Head | 3 Sizes | Adjustable Beam Angle

MOUNTING ACCESSORIES

ORDERING CODE		DESCRIPTION	PICTURE
T10016	-WH	Monopoint adapter Surface / wall mount Compatible with Juno system 1 Track head can be installed.	
	-BK		
T10017	-WH	Duopoint adapter Surface / wall mount Compatible with Juno system. 2 Track heads can be installed.	
	-BK		


LUMEN ESTIMATE


Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS

CCT	3000K	3500K	4000K
PREMIUM (90CRI)	1	1.03	1.07

PHOTOMETRIC DATA EQUATOR MINI

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
TL-EQM12-VAP2750XXX		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc		Beam Width	
Wattage	16W	0-20°	902.47	82.1		1.7ft	3784 fc	0.5 ft	0.5 ft
CCT	3000K	0-30°	981.61	89.3		3.3ft	1004 fc	0.9 ft	0.9 ft
Distribution	15°	0-40°	1017.42	92.6		5.0ft	437 fc	1.3 ft	1.3 ft
CBCP	10936	0-60°	1057.33	96.2		6.7ft	244 fc	1.8 ft	1.8 ft
		0-80°	1074.36	97.8		8.3ft	159 fc	2.2 ft	2.2 ft
		0-90°	1078.38	98.1		10.0ft	109 fc	2.7 ft	2.7 ft
						■ Vert. Spread: 15.3° ■ Horiz. Spread: 15.3°			


PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
TL-EQM12-VAP2750XXX		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc		Beam Width	
Wattage	16W	0-20°	612.67	43.4		1.7ft	659 fc	1.6 ft	1.6 ft
CCT	3000K	0-30°	1046.21	74.1		3.3ft	175 fc	3.1 ft	3.1 ft
Distribution	53°	0-40°	1289.31	91.3		5.0ft	76.2 fc	4.7 ft	4.7 ft
CBCP	1903	0-60°	1373.57	97.3		6.7ft	42.4 fc	6.2 ft	6.3 ft
		0-80°	1387.82	98.3		8.3ft	27.6 fc	7.7 ft	7.8 ft
		0-90°	1391.55	98.5		10.0ft	19 fc	9.3 ft	9.4 ft
						■ Vert. Spread: 50.0° ■ Horiz. Spread: 50.1°			


TRACK LED LIGHT

Cylinder Track Head | 3 Sizes | Adjustable Beam Angle


PHOTOMETRIC DATA


EQUATOR

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
TL-EQ12-VAP2750XXX		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc		Beam Width	
Wattage	20W	0-20°	1420.83	87.5		1.7ft	4793 fc	0.5 ft	0.5 ft
CCT	3000K	0-30°	1501.32	92.5		3.3ft	1272 fc	1.1 ft	1.1 ft
Distribution	19°	0-40°	1533.53	94.4		5.0ft	554 fc	1.6 ft	1.6 ft
CBCP	13850	0-60°	1574.45	97		6.7ft	309 fc	2.2 ft	2.2 ft
		0-80°	1592.32	98.1		8.3ft	201 fc	2.7 ft	2.7 ft
		0-90°	1598.51	98.5		10.0ft	139 fc	3.2 ft	3.2 ft
						■ Vert. Spread: 18.3° ■ Horiz. Spread: 18.4°			

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
TL-EQ12-VAP2750XXX		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc		Beam Width	
Wattage	20W	0-20°	949.77	45		1.7ft	963 fc	1.7 ft	1.7 ft
CCT	3000K	0-30°	1649.66	78.2		3.3ft	256 fc	3.3 ft	3.3 ft
Distribution	52°	0-40°	1986.9	94.2		5.0ft	111 fc	5.0 ft	5.0 ft
CBCP	2782	0-60°	2071.36	98.2		6.7ft	62 fc	6.6 ft	6.7 ft
		0-80°	2081.53	98.7		8.3ft	40.4 fc	8.2 ft	8.3 ft
		0-90°	2085.43	98.9		10.0ft	27.8 fc	9.9 ft	9.9 ft
								■ Vert. Spread: 52.7° ■ Horiz. Spread: 52.9°	

EQUATOR GRANDE

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
TL-EQG12-VAP2750XXX		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc		Beam Width	
Wattage	29W	0-20°	1866.46	79.2		1.7ft	5429 fc	0.6 ft	0.6 ft
CCT	3000K	0-30°	2078.53	88.2		3.3ft	1441 fc	1.1 ft	1.1 ft
Distribution	20°	0-40°	2173.85	92.3		5.0ft	628 fc	1.7 ft	1.7 ft
CBCP	15689	0-60°	2274.85	96.5		6.7ft	350 fc	2.3 ft	2.3 ft
		0-80°	2318.87	98.4		8.3ft	228 fc	2.8 ft	2.8 ft
		0-90°	2329.36	98.9		10.0ft	157 fc	3.4 ft	3.4 ft
						■ Vert. Spread: 19.4° ■ Horiz. Spread: 19.4°			

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
TL-EQG12-VAP2750XXX		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc		Beam Width	
Wattage	29W	0-20°	1241.14	44.6		1.7ft	1356 fc	1.5 ft	1.5 ft
CCT	3000K	0-30°	2067.14	74.3		3.3ft	360 fc	2.9 ft	3.0 ft
Distribution	44°	0-40°	2492.87	89.6		5.0ft	157 fc	4.4 ft	4.5 ft
						6.7ft	87.3 fc	5.9 ft	6.0 ft
CBCP	2771	0-60°	2716.77	97.6		8.3ft	56.9 fc	7.3 ft	7.5 ft
		0-80°	2747.66	98.8		10.0ft	39.2 fc	8.8 ft	9.0 ft
		0-90°	2753.14	99	■ Vert. Spread: 47.6° ■ Horiz. Spread: 48.5°				

TRACK LED LIGHT

Cylinder Track Head | 3 Sizes | Adjustable Beam Angle

OVERVIEW



Innovative Design

- Aluminum die-cast housing for better heat dissipation.
- Improved design extends LED and driver lifespan.



Multiple Options

- 20W power.
- Variety of beam angles.
- 5 CCTs Switchable.
- 90 CRI
- Black and White



Mountings Available

- Choose from any of the popular track systems such as Juno, Halo, Lightolier, or Global.
- Surface mount with either monopoint or duopoint adapters.



Accessories

- Detecta motion sensor to illuminate whenever presence is detected



Tests And Certifications

