

EXITA RUNNING MAN

Project Information

Type: Date:
 Project:
 Catalog #:
 Notes:

The Running Man pictogram, on one face or both, points the way to the exit indoors or out. Exit and emergency LED fixtures in aluminum or thermoplastic, with square or round combo heads, UL-924 listed.

Stairwells

Hallways

Offices

Commercial Spaces



Key Specifications

Electrical

Input voltage	120-347V
Power factor	>0.9
THD	<20%
Power	2W - 6W

Battery

Type	Ni-Cad · Lead acid
Charging time	≤ 24h
Discharging time	90min · 120min

Physical

Housing	Thermoplastic · Steel
Finish	White · Black
Faces	Single · Double
Mounting	Ceiling · Wall · End
Ambient	0°C to 40°C

Certifications

Application	Damp location
Listings	UL-924 · CSA C22.2 #141-15
Also	NFPA 101 · NEC · OSHA

System Warranty

2 years

Eralux will warrant defective drivers, LEDs and boards for 2 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

Series Line-Up



CR-7008M2

Thermoplastic · Edge lit



B2408U

Thermoplastic · Edge lit



CR-7020BE

Thermoplastic



CR-7106

Steel



BY-F5025CA

Steel



F2230CA

Thermoplastic · Combo



CR-7020AE

Thermoplastic · Combo



BY-F5024CA

Steel · Combo



CR-7107

Steel · Combo · Remote capability



Comes standard with 3 pictograms



French "SORTIE" version

Comes standard with 3 pictograms. French "SORTIE" version available for the Quebec market — not available for B2408U and CR-7107.


CR-7008M2

Specifications


Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	3.5W
Housing	Thermoplastic ABS
Finish	White
Configuration	Single or double face
	Comes standard with 3 pictograms
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤ 24h
Discharging Time	120min
Battery	High performance Ni-Cad battery
	with test switch
Application	Damp location
Protections	UL-94-5VA flame-retardant
	Fire-resistant
Compliant	CSA Certified to C22.2 #141-15
	UL-924
	NFPA 101 Life Safety Code
	NEC
	OSHA



Mounting


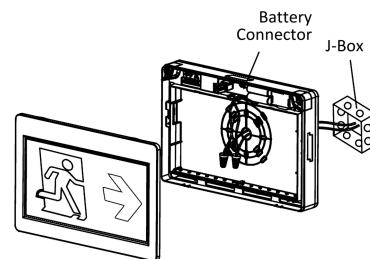


Wall mounting



Ceiling mounting

Dimensions

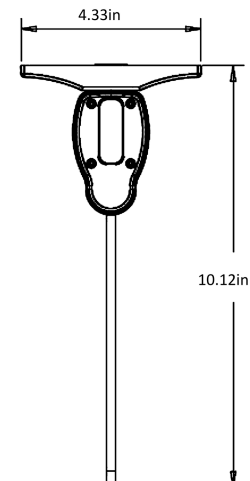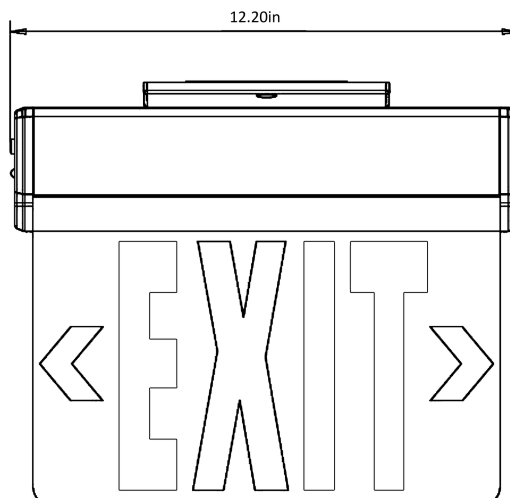


B2408U

Specifications


Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	2W
Housing	UV stabilized thermoplastic
Finish	White
Configuration	Single or double face
Comes standard with 3 pictograms	
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤ 24h
Discharging Time	90min
Battery	High performance Ni-Cad battery
	with test switch
Application	Damp location
Protections	UL-94-V0 flame-retardant
	Fire-resistant
Compliant	UL Certified to C22.2 #141-15



Mounting


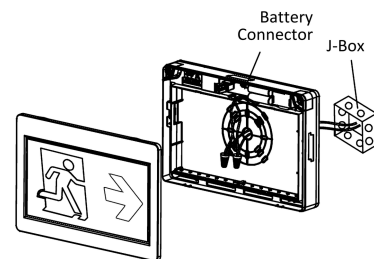


Wall mounting



Ceiling mounting

Dimensions

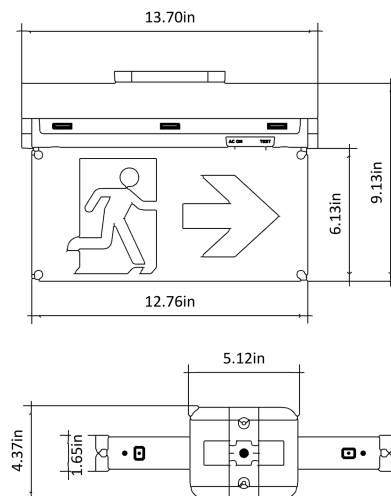

CR-7020BE

Specifications

Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	3.5W
Housing	Thermoplastic ABS
Finish	White — CR-7020BE Black — CR-7020BE-BK
Configuration	Single or double face Comes standard with 3 pictograms French "SORTIE" sign available
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤24h
Discharging Time	≥ 120min
Battery	High performance Ni-Cad battery with test switch
Application	Damp location
Protections	UL-94-5VA flame-retardant Fire-resistant
Compliant	CSA certified to C22.2 #141-15 UL-924 NFPA 101 Life Safety Code NEC OSHA




White — CR-7020BE




Black — CR-7020BE-BK


Mounting



Wall mounting


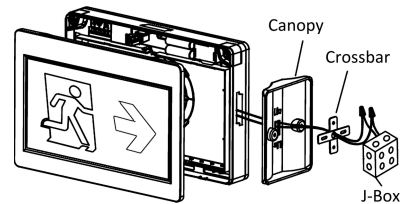


Side mounting



Ceiling mounting

Dimensions

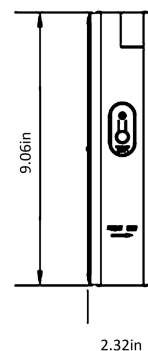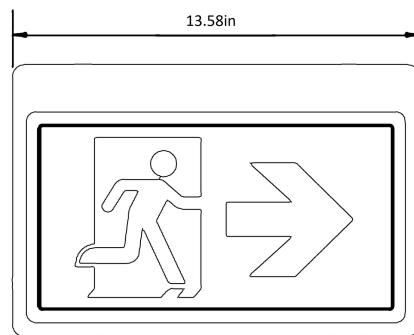


CR-7106

Specifications


Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	4W
Housing	Steel frame
Finish	Powder coated white
Configuration	Single or double face
	Comes standard with 3 pictograms
	French "SORTIE" sign available
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤ 24h
Discharging Time	≥ 90min
Battery	High performance Ni-Cad battery with test switch
Application	Damp location
Protections	UL-94-V0 flame-retardant Fire-resistant
Compliant	CSA certified to C22.2 #141-15 UL-924 NFPA 101 Life Safety Code NEC OSHA




Mounting



Wall mounting

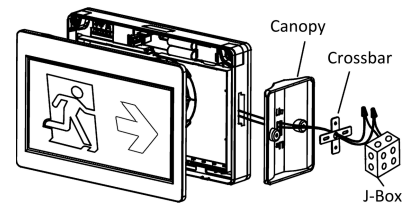


Side mounting



Ceiling mounting

Dimensions

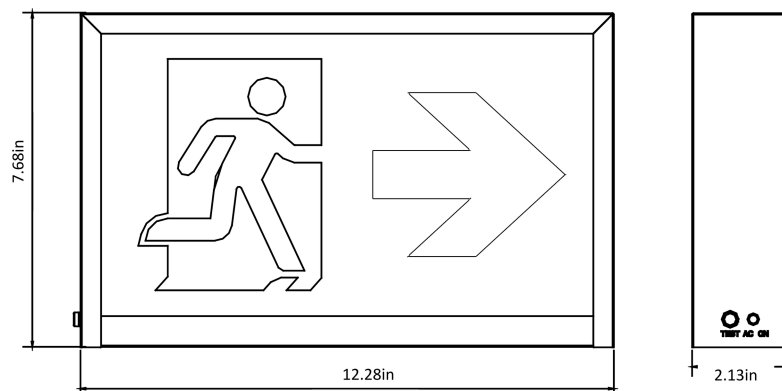


BY-F5025CA

Specifications


Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	2W
Housing	Steel frame
Finish	Powder coated white
Configuration	Single or double face
Comes standard with 3 pictograms	
French "SORTIE" sign available	
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤ 24h
Discharging Time	≥ 90min
Battery	High performance Ni-Cad battery with test switch
Application	Damp location
Protections	UL-94-V0 flame-retardant Fire-resistant
Compliant	UL certified to C22.2 #141-15




Mounting



Wall mounting

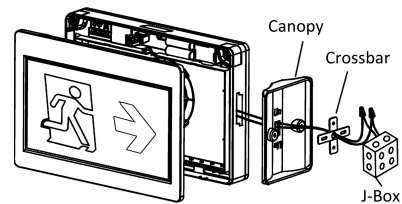


Side mounting



Ceiling mounting

Dimensions

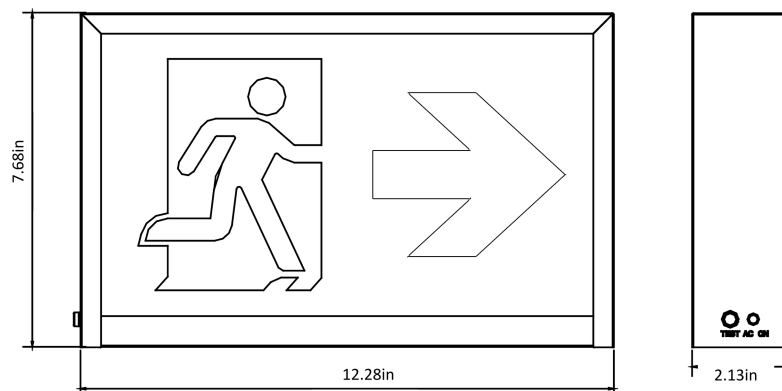


F2230CA

Specifications


Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	4.5W
Housing	UV stabilized thermoplastic
Finish	White
Configuration	Single or double face
	Comes standard with 3 pictograms
	French "SORTIE" sign available
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤ 24h
Discharging Time	≥ 90min
Battery	High performance Ni-Cad battery with test switch
Application	Damp location
Protections	UL-94-V0 flame-retardant Fire-resistant
Compliant	UL certified to C22.2 # 141-15




Mounting



Wall mounting

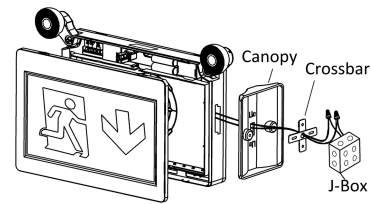


Side mounting



Ceiling mounting

Dimensions

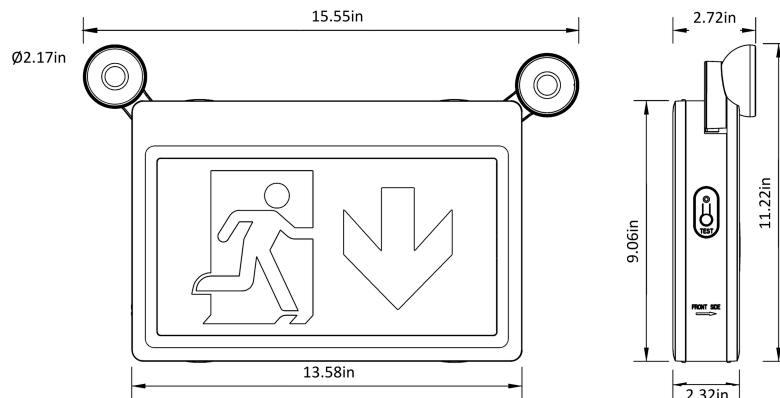

CR-7020AE

Specifications


Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	6W
Housing	Thermoplastic ABS
Finish	White — CR-7020AE Black — CR-7020AE-BK
Configuration	Single or double face Comes standard with 3 pictograms French "SORTIE" sign available
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤ 24h
Discharging Time	≥ 90min
Battery	High performance Ni-Cad battery with test switch
Application	Damp location
Protections	UL-94-V0 flame-retardant Fire-resistant
Compliant	CSA certified to C22.2 # 141-15 UL-924 NFPA 101 Life Safety Code NEC OSHA




White — CR-7020AE

Black — CR-7020AE-BK


Mounting



Wall mounting

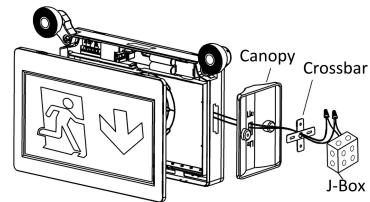


Side mounting



Ceiling mounting

Dimensions

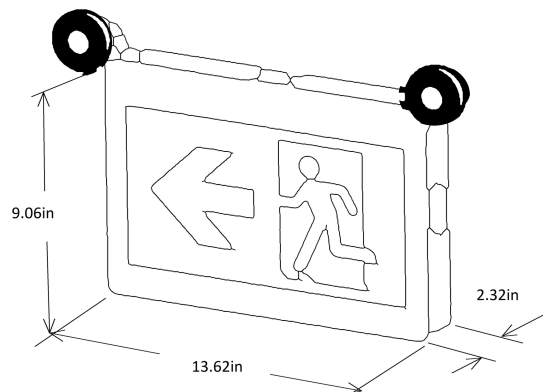


BY-F5024CA

Specifications


Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	2W
Housing	Steel frame
Finish	White
Configuration	Single or double face
Comes standard with 3 pictograms	
French "SORTIE" sign available	
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤ 24h
Discharging Time	≥ 90min
Battery	High performance Ni-Cad battery with test switch
Application	Damp location
Protections	UL-94-V0 flame-retardant
Fire-resistant	
Compliant	UL certified to C22.2 #141




Mounting



Wall mounting

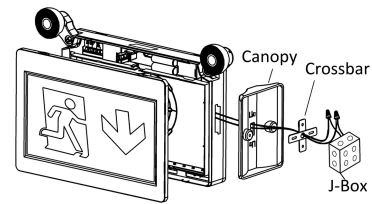


Side mounting



Ceiling mounting

Dimensions

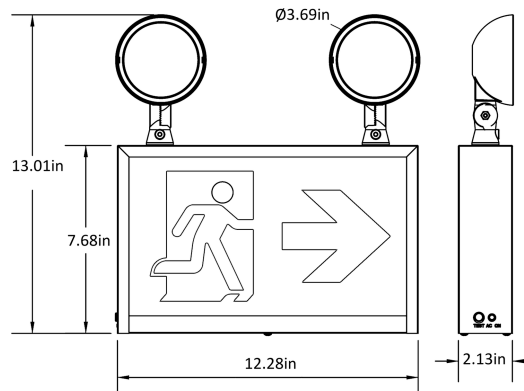


CR-7107

Specifications


Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Power	5W
Housing	Steel frame
Head material	Thermoplastic ABS
Finish	Powder coated white
Configuration	Single or double face
Comes standard with 3 pictograms	
Ambient Temperature Range	0°C to 40°C
Mounting Options	Ceiling, wall, end mount
Charging Time	≤ 24h
Discharging Time	120min
Battery	Lead acid battery
Application	Damp location
Protections	UL-94-V0 flame-retardant
Fire-resistant	
Compliant	CSA certified to C22.2 # 141-15
UL-924	
NFPA 101 Life Safety Code	
NEC	
OSHA	




Mounting



Wall mounting

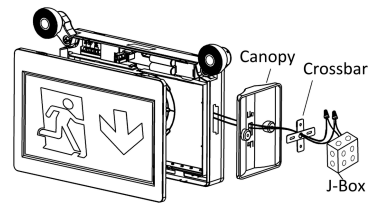

Side mounting



Ceiling mounting

Dimensions

