

G5

Direct Architectural Linear

INPUT VOLTAGE

120 -277/347 V

SIZE & POWER & LUMENS

2 ft	20 W	2100 lm
3 ft	30 W	3150 lm
4 ft	40 W	4400 lm
5 ft	50 W	5500 lm
6 ft	60 W	6600 lm
8 ft	80 W	8800 lm

CRI

80 (Optional: 90)

DIMMING


0-10 V: 10%, 1% (Optional)

TRIAC (Optional)


FINISH



ACOUSTIC HOUSING FINISH



CUSTOM DESIGN & LENGTH LIT JOINERS

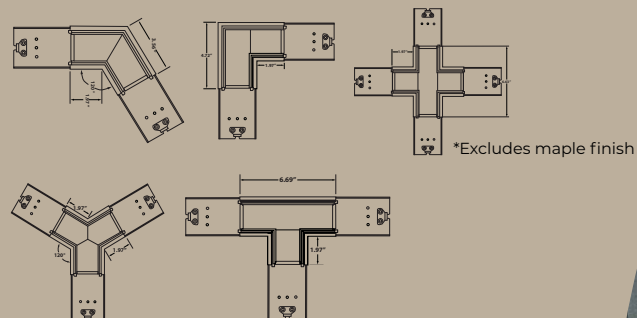


CCT SWITCHABLE



MOUNTING OPTIONS

Suspended Mount

Wall Mount Recessed T-Grid

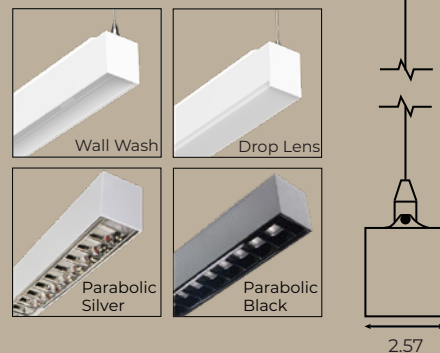

eralux®