

GARDENA ULTIMATE

Uniform light for landscape and accent applications. GARDENA ULTIMATE pairs a durable die-cast, IP65 rated housing with switchable power and CCT and an integrated photocell.

Landscape

Architectural

Deck & Patio

Pools & Security



Key Specifications

Electrical

Input voltage	120-277/347V
Power factor	>0.9
THD	<20%
Dimming	0-10V dimming
Power	15/20/25W

Optical

CRI	70 CRI
CCT	3000K · 4000K · 5000K
Efficacy	~120lm/W
Beam angle	Variable 47°-130°
Distribution	60°

Physical

Mounting	Ground · Wall mount
Brackets	Ground spike · Round wall plate
Finish	Black · Bronze
Ambient	-40°C to 45°C
Protection	IP65 · IK08
Controls	Integrated photocell

Certifications

Listings	ETL · DLC Premium · RoHS
----------	--------------------------

System Warranty

5 years

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

Lumen Maintenance

L85 at 50000h

Rated for 85% initial lumen output at 50000h of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

Ordering Guide - Fixture

Assembled Catalog Number

[RESET](#)

AE-OD-GA

01 FIXTURE FAMILY



AE-OD-GA

ERALUX Gardena Ultimate landscape lighting

02 POWER

-25W

Power switchable
15W/20W/25W
1800/2400/3000lm

03 INPUT VOLTAGE

-CA

120-277/347V

04 CCT

-TCP

CCT selectable
3000/4000/5000K

05 FINISH



-BK
Black



-BZ
Bronze

1. Wall and ground mount are both provided as a package in one single SKU. 2. Integrated photocell; can be turned on/off easily on field upon your request.


DLC Qualified Model

DLC	PRODUCT ID	MODEL NUMBER	CATEGORY	CLASS
5.1	S-XJSDWT	AE-OD-GA-15W-CA-TCP-[BK,BZ][Blank,(PT)]	Outdoor	Premium
5.1	S-YDQ8CZ	AE-OD-GA-25W-CA-TCP-[BK,BZ][Blank,(PT)]	Outdoor	Premium

Design Lights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

Dimensions

AE-OD-GA-25W-CA-TCP-XX

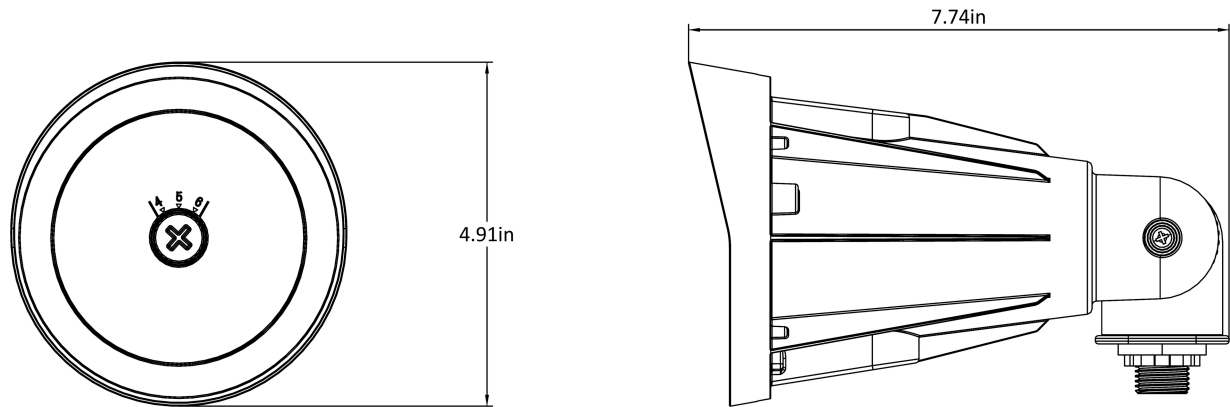

Front view and side view. All dimensions in inches.

Mounting Options

Surface / wall mount



ø4-1/2in round wall plate · single fixture mounting hole · bronze/black finish

Ground mount



1-1/2in x 6-3/4in ground spike with feed-through hole for wiring · 1/2in NPS threaded hubs · bronze/black finish

Features

Versatile: switchable CCT and power offer versatile customization. Ideal for both residential and commercial projects. Built to withstand tough conditions for long-term reliability.

Innovative design: heavy-duty, die-cast aluminum tiltable knuckle base utilizes tooth-lock adjustment with visual 90-degree adjustment (Outward/Inward).

Multiple options: CCT switchable 30/40/50K · Black/Bronze finish · power switchable 15/20/25W · integrated photocell, on/off switchable on field.


Brackets: ground spike · round wall plate.

Distribution: variable beam angle 47°-70° · 70°-100° · 100°-130°.

Mountings available: ground mount · wall mount.

Protection: protected against dust ingress · protected against water jets · impact resistant.

Installation: [Install Instruction link](#).



3000K **× 1** 4000K **× 1.02** 5000K **× 1.03**