

APEX BOLLARDS

OUTDOOR LED LIGHT

Bollards | Ø 6.40 in | CCT & Power Switchable

The Apex Bollard Series offers an elegant lighting solution for outdoor spaces, with three power options, three CCT choices, and integrated photocell. These fixtures are built to withstand harsh weather conditions. Their advanced optical systems deliver effective illumination with minimal glare. Distinguished by exceptional photometric performance and efficiency, this bollard series provides a high-quality, economical lighting choice.

Applications: Garden | Industrial park | Walkway | Pathway



DYNAMIC MENU

Order Information	Page 2
Dimensions	Page 3
Photometric Data	Page 5

[Install Instruction link](#)

SPECIFICATIONS

Input Voltage	120-277/347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming	0-10V dimming
CRI	70 CRI
CCT	30K 40K 50K
Efficacy	~150 lm/W
Power	14W 19W 24W
Ambient Temperature Range	-40°C to 45°C
Mounting Options	Concrete anchor mount
Fixture Finish	Black
Protection	IP65; water and dust resistance 10KV surge protector
Distribution	360°
Lens	Polycarbonate
Shaft Height	30 in

eralux®

DATE	QTY	ACC. QTY	TYPE
PROJECT			
PN			
ACCESSORY PN			
NOTES			



PRODUCT FEATURES



PRODUCT CERTIFICATIONS



Design Lights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified” [page 7](#)

SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 50,000 hours

Rated for 70% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

OUTDOOR LED LIGHT

Bollards | Ø 6.40 in | CCT & Power Switchable



ORDERING GUIDE

AE-OD		-24W	-TCP	-70	-BK	
AE-OD ERALUX Apex Bollard Series 120-277/347V	-CS-CA Casey -SH-CA Shredder -BE-CA Bebop -BX-CA Baxter -RS-CA Rocksteady -KR-CA Krang	-24W 14/19/24 Switchable 2100/2850/3600 lm	-TCP 3000/4000/5000K CCT Switchable	-70 70 CRI	-BK Black Powder Coat	[BLANK] 30" Height -51R ¹ 51" Round Height Shaft

Fixture Family

Bollard Head

Power

CCT

CRI

Finish

Height

NOTE

Integrated photocells comes with all fixtures, can be turned on/off on the field.

1. The 51" height round shaft is not compatible with the Krang head.

BOLLARD HEADS

APEX BOLLARDS

CASEY



SHREDDER



BEBOP



BAXTER



ROCKSTEADY



KRANG




OUTDOOR LED LIGHT

Bollards | Ø 6.40 in | CCT & Power Switchable


DIMENSIONS - FIXTURE

APEX BOLLARDS


Casey

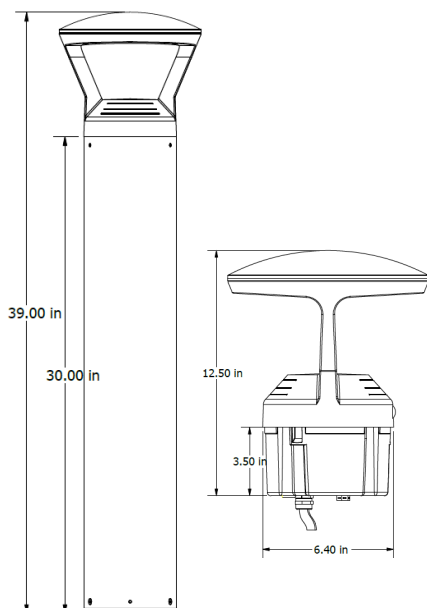


Shredder

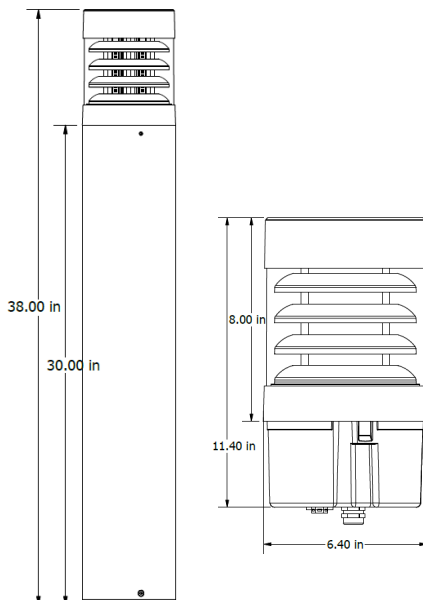


Bebop

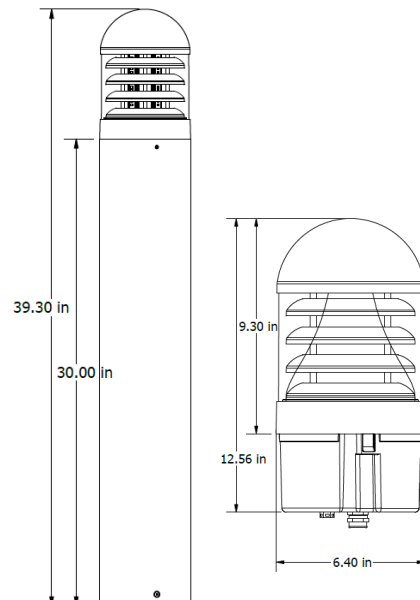


Baxter

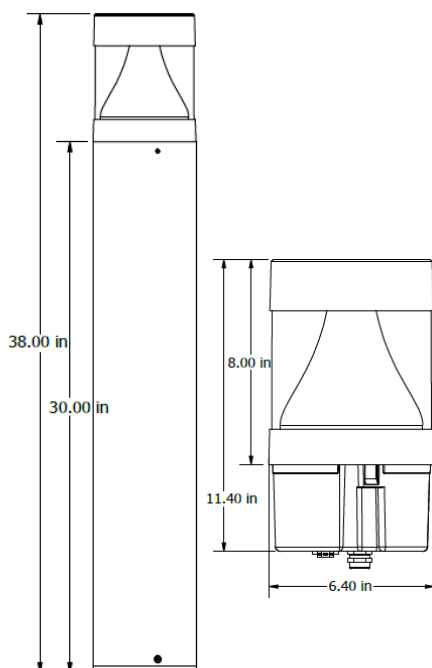

Rocksteady

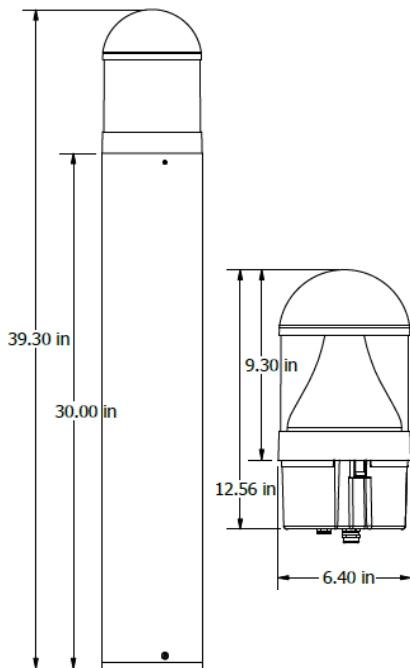

Krang

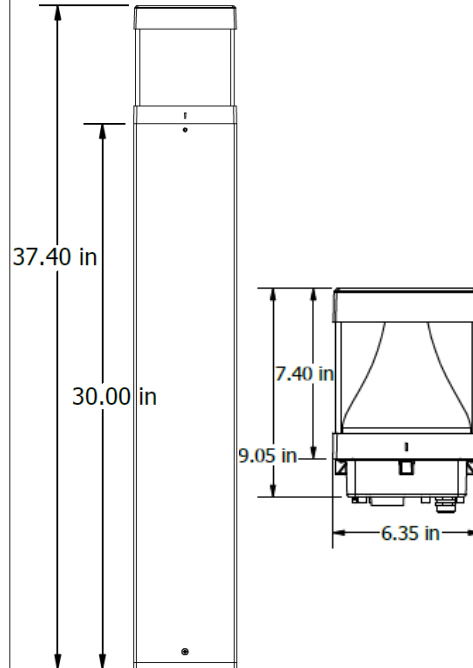

OUTDOOR LED LIGHT

Bollards | Ø 6.40 in | CCT & Power Switchable




B-U-G RATING

CASEY	
POWER	BUG RATING
24W	B1-U3-G1
SHREDDER	
POWER	BUG RATING
24W	B2-U4-G3
BEBOP	
POWER	BUG RATING
24W	B2-U3-G2
BAXTER	
POWER	BUG RATING
24W	B2-U3-G2
ROCKSTEADY	
POWER	BUG RATING
24W	B2-U3-G2
KRANG	
POWER	BUG RATING
24W	B2-U3-G2

OUTDOOR LED LIGHT

Bollards | Ø 6.40 in | CCT & Power Switchable




PHOTOMETRIC DATA

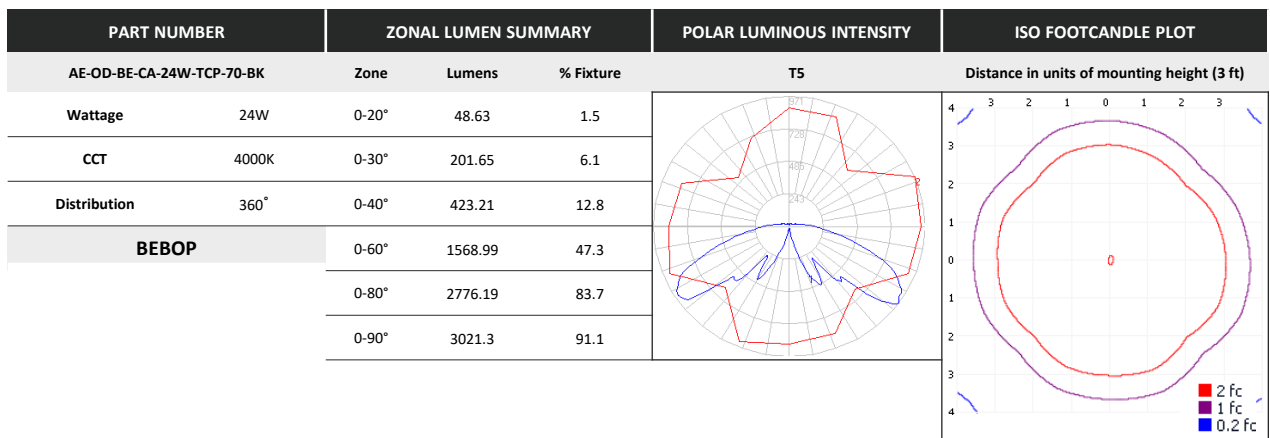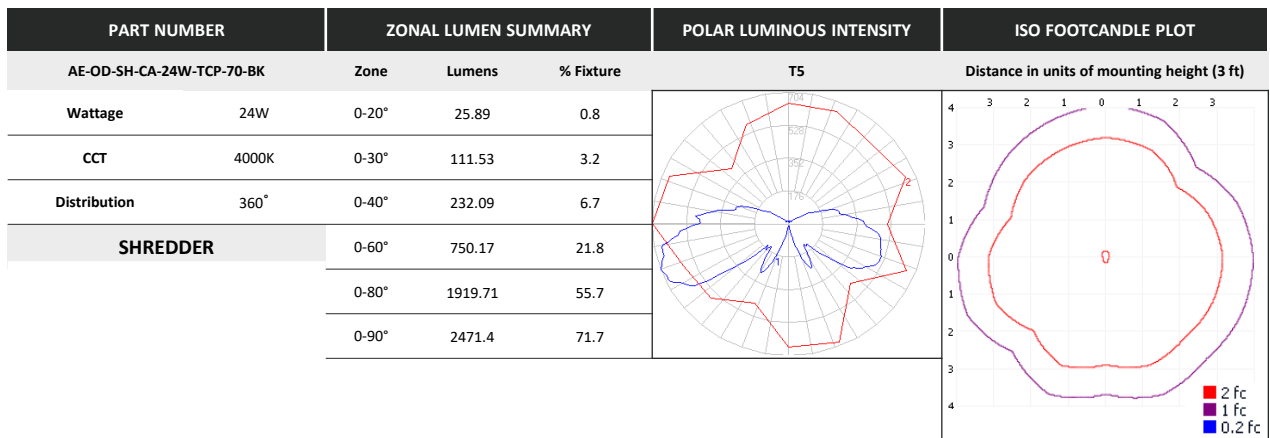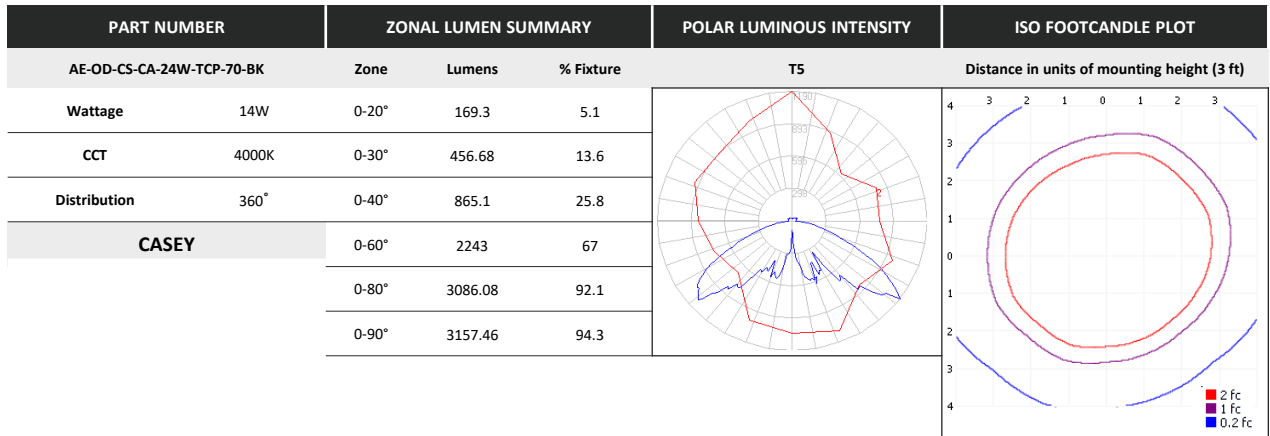

OUTDOOR LED LIGHT

Bollards | Ø 6.40 in | CCT & Power Switchable

PHOTOMETRIC DATA

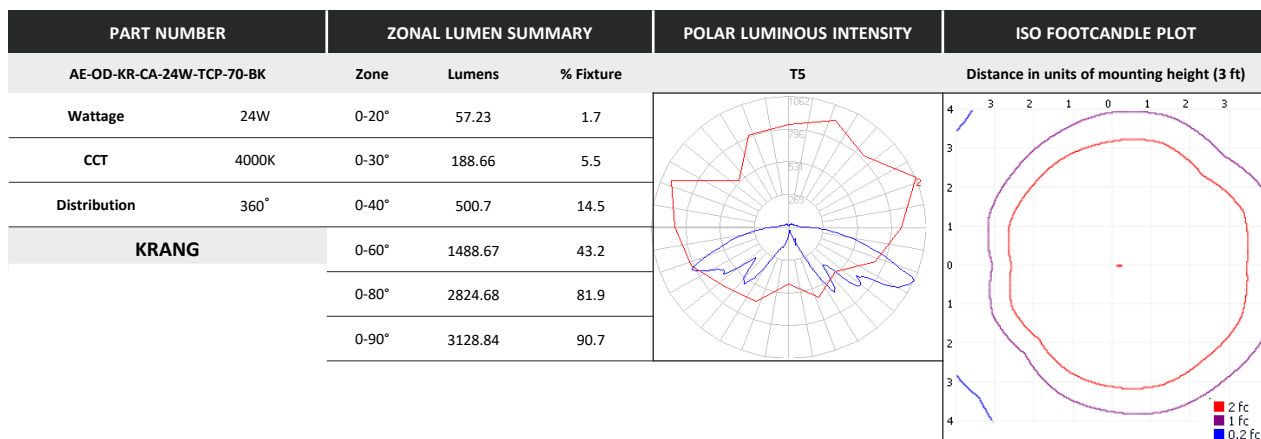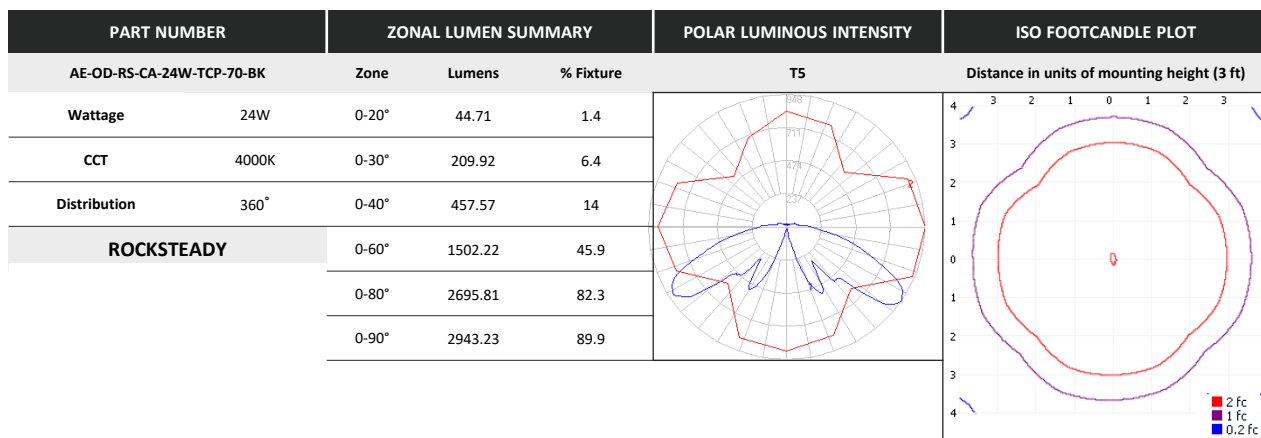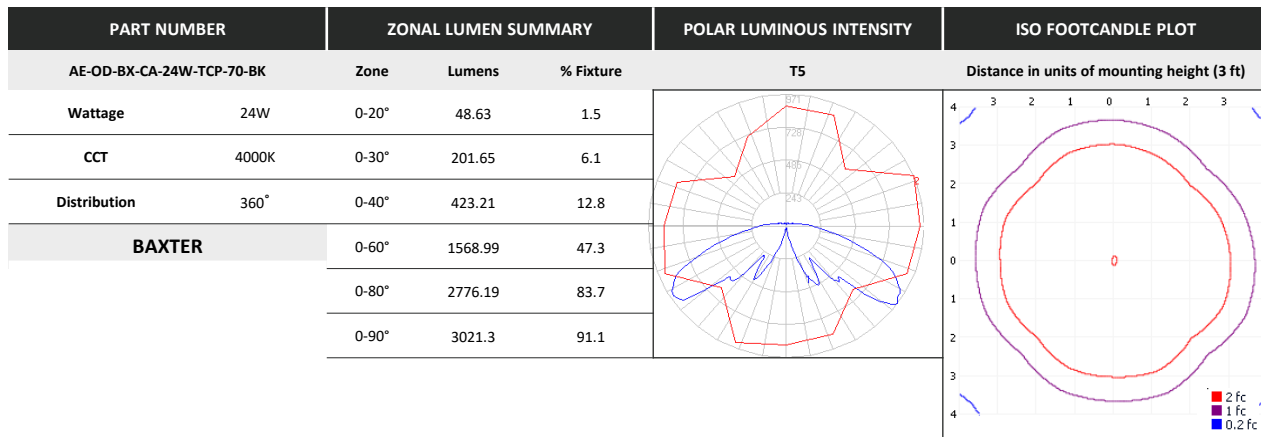

OUTDOOR LED LIGHT

Bollards | Ø 6.40 in | CCT & Power Switchable

OVERVIEW



Innovative Design

- Aluminum die cast housing and corrosion resistant finish.
- Highly robust polycarbonate and high transmittance lens.



Protection



- Protected against dust ingress.
- Protected against water jets
- 10KV surge protector



Tests And Certifications



Multiple Options

- 3 different powers options.
- 3 different CCTs.
- On/off integrated photocell



Mountings Available

- Concrete anchor mount



DLC

Name	DLC MODEL	PRODUCT ID	Primary Use	Classification
Casey	AE-OD-CS-CA-24W-TCP-Y-ZZ	S-J9WC1R	Bollards	Premium
Shredder	AE-OD-SH-CA-24W-TCP-Y-ZZ	S-T1Z00P		Premium
Bebop	AE-OD-BE-CA-24W-TCP-Y-ZZ	S-NS4NLX		Premium
Baxter	AE-OD-BX-CA-24W-TCP-Y-ZZ	S-SCQNKB		Premium
Rocksteady	AE-OD-RS-CA-24W-TCP-Y-ZZ	S-XRY255		Premium
Krang	AE-OD-KR-CA-24W-TCP-Y-ZZ	S-WK61V0		Premium

Casey



Shredder



Bebop



Baxter



Rocksteady



Krang

