


Olympus

Indirect Architectural Troffer | 1x4, 2x2, 2x4

INPUT VOLTAGE	120 - 277/347 V
SIZE & POWER & LUMENS	1x4' 36/42/50 W 4860/5670/6750 lm 2x2' 24/30/36 W 3240/4050/4860 lm 2x4' 36/42/50 W 4860/5670/6750 lm
CRI	90
DIMMING	0 - 10V (1%)
CCT	30K 35K 40K
DISTRIBUTION	115° Indirect Lambertion
MOUNTING OPTIONS	Recessed T-Grid

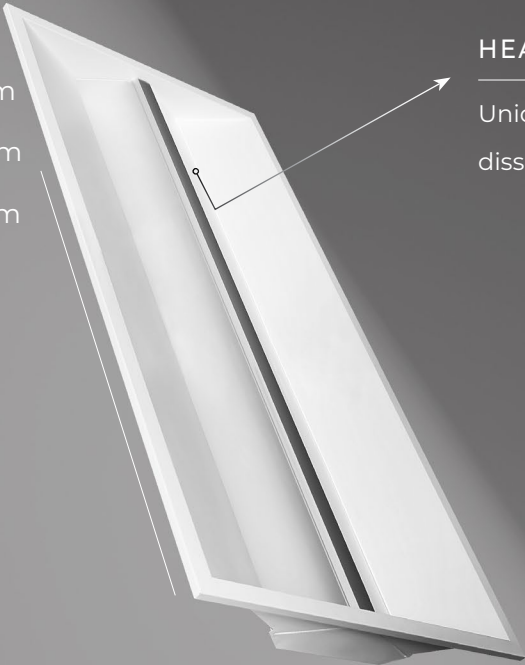

HEATSINK DESIGN

Unique design allows for efficient heat dissipation.

INDIRECT LIGHTING

Enhanced glare reduction
1% Dimming capabilities



-  Built to Last
-  High Performance
-  Easy Installation
-  LUTRON Compatible
- 