

OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable

The Pago series comes in a smooth matte design offering a high power and lumens to any dark outdoor spaces. Its IP65 offers great protection to outdoor environments making it suitable to be wall mounted above garages, warehouse facades and more.

Applications: Building facade | Pathway | Entrance

	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				

DYNAMIC MENU

Order Information	Page 2
Dimensions	Page 2
Accessories	Page 3
Photometric Data	Page 5

[Install Instruction link](#)

SPECIFICATIONS

Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming	0-10V
CRI	80 CRI
CCT	30K 40K 50K
Efficacy	~150 lm/W
Power (W)	90/120/150
Ambient Temperature Range	-40°C to 45°C
Mounting Options	Wall Mount
Fixture Finish	Black White Bronze
Controls	Integrated Photocell Emergency Battery Back up Motion Sensor
Protection	IP65 6kV Surge Protector
Distribution	Type 2 Type 3 Type 4



PRODUCT FEATURES



PRODUCT CERTIFICATIONS



SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 100,000 hours

Rated for 70% initial lumen output at 100,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable

 ORDERING GUIDE

WP-PG	-150W		-CA				
WP-PG PAGO Outdoor wedge High Output Wall Pack	-150W 90/120/150W 13500/18000/22500lm	-30K ¹ 3000K -40K 4000K -50K 5000K	-CA 120-347V	-[Blank] 0-10V Dimming -MS Microwave motion sensor -PC Photocell	-T2 T2 -T3 T3 -T4 T4	-BZ Bronze -BK Black -WH White	-[Blank] No EMBB -EM 8W integrated EMBB
Fixture Family	Power	CCT	Voltage	Controls	Lens	Finish	EMBB

- NOTES
1.

For the DarkSky compliant the CCT will be fixed at 3000K.

External EMBB option




AE-WP-ET-20W-EM-KIT

20W External Emergency Battery Backup

EMBB

DIMENSIONS

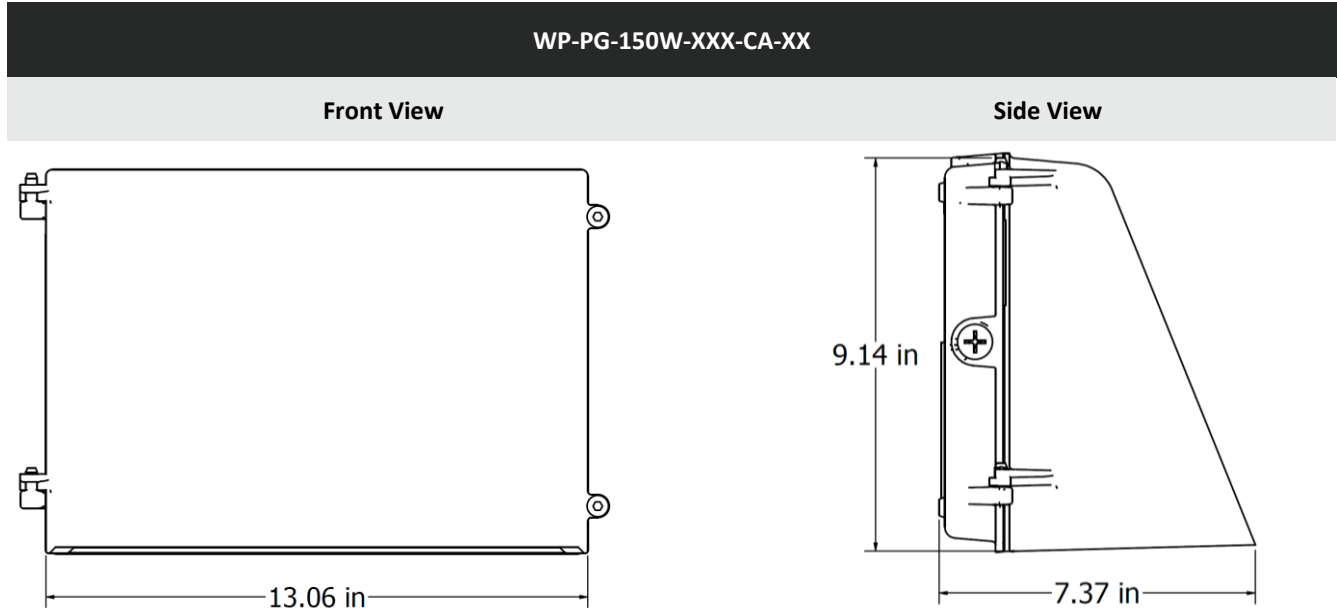

OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable

ACCESSORIES

EMERGENCY LED DRIVER (Integrated)

AE-WP-EMBB-8W-CA



OUTPUT POWER : 8W

SPECIFICATION	
Input voltage	100-347Vac
Input current	100mA max
Recharge time	24Hrs
Discharge time	1.5H
Emergency power	8W
Installation	Integrated inside fixture





Introducing a UL-listed emergency lighting solution for the US and Canada, featuring high output voltage, self-testing, and overcharge/discharge protection. Compliant with UL924 and CSA C22.2 NO.141, it's suitable for field or factory installation and integrates seamlessly with LED drivers. With low energy consumption and Title20 compliance, it offers 8W emergency power options, a quick 24-hour recharge time, and 1.5-hour discharge time.

DRIVER DIMENSIONS

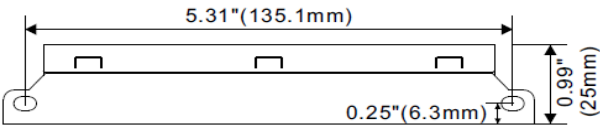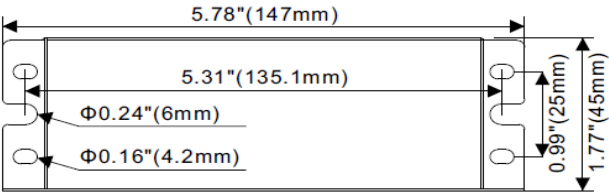

BATTERY DIMENSIONS

8W VERSION

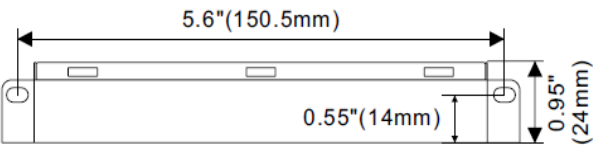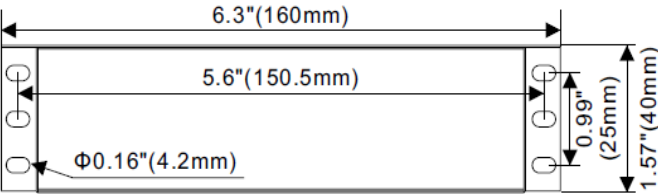

OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable


ACCESSORIES

MOTION SENSOR


CODE	DESCRIPTION	PICTURE
AE-IL-SB2-CA-MOTIONSENSOR	Plug in low-voltage microwave motion sensor with white arm	
AE-IL-SB2-CA-REMOTE-CTRL	Remote control for the motion sensor	

Factory mode

Factory Default Setting	
Sensitivity	100%
Hold on time	5 min
Daylight Sensor	ON
Dimming level	30%
Dimming time	30 min

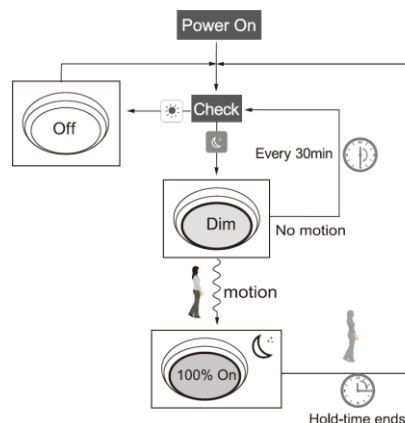

Area Coverage

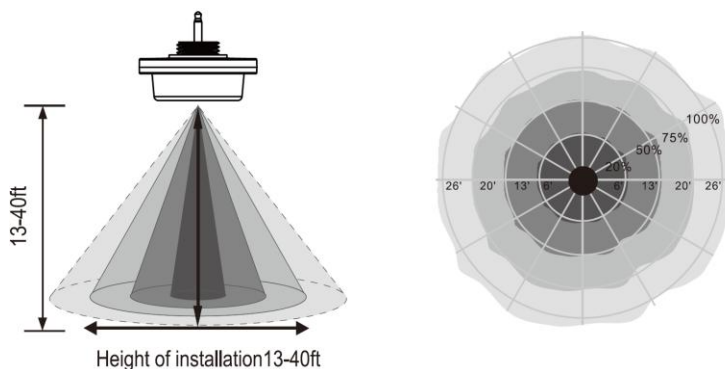

OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable

ACCESSORIES

PHOTOCELL KIT

CODE	DESCRIPTION	PICTURE
AE-WP-PHOTOCELL-CA	12V DC photocell	

DARK SKY COMPLIANT

The fixture must be at 3000K CCT to be compliant with DARKSKY.

Dark Sky Features

Restrict the amount of upward-Directed light

Reduce Glare

Reduce Light Pollution

B-U-G RATING


POWER	CCT	DISTRIBUTION	B-U-G
90W	30K	T2	B3-U0-G1
		T3	B2-U0-G2
	50K	T4	B3-U0-G2
		T3	B2-U0-G2
120W	30K	T4	B3-U0-G3
		T2	B3-U0-G2
	50K	T3	B3-U0-G2
		T4	B3-U0-G2
150W	30K	T4	B3-U0-G3
		T2	B4-U0-G2
	50K	T3	B3-U0-G3
		T4	B3-U0-G2

OUTDOOR LED LIGHT


High Output Wedge Cut-Off Wall Pack | Power Switchable

PHOTOMETRIC DATA

T3 Lens

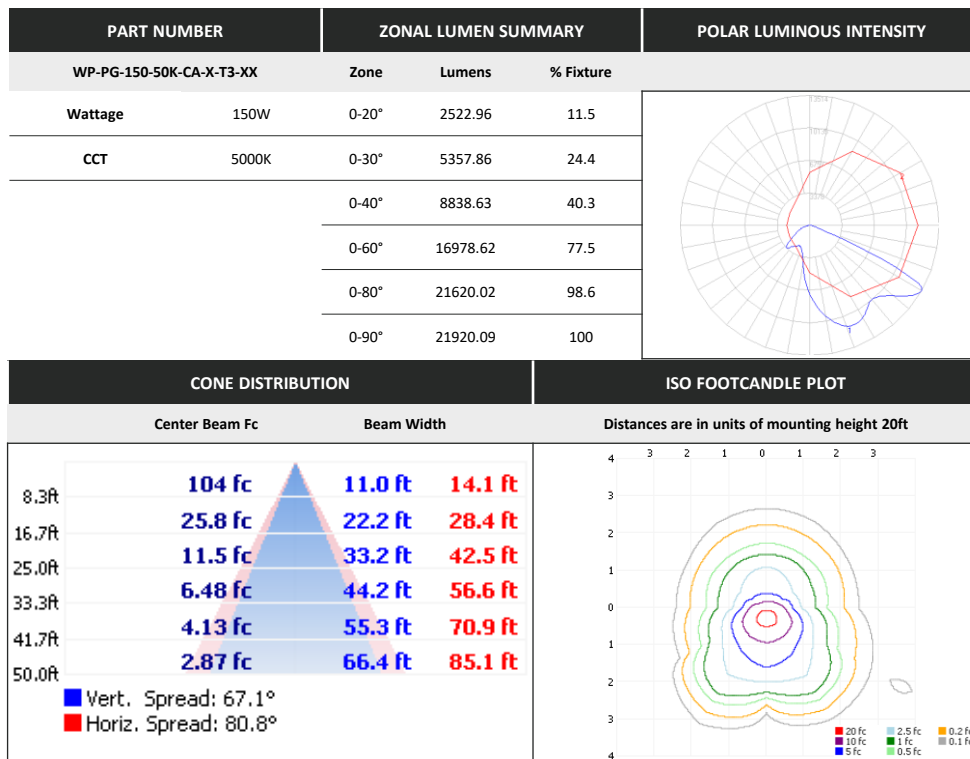

T4 Lens

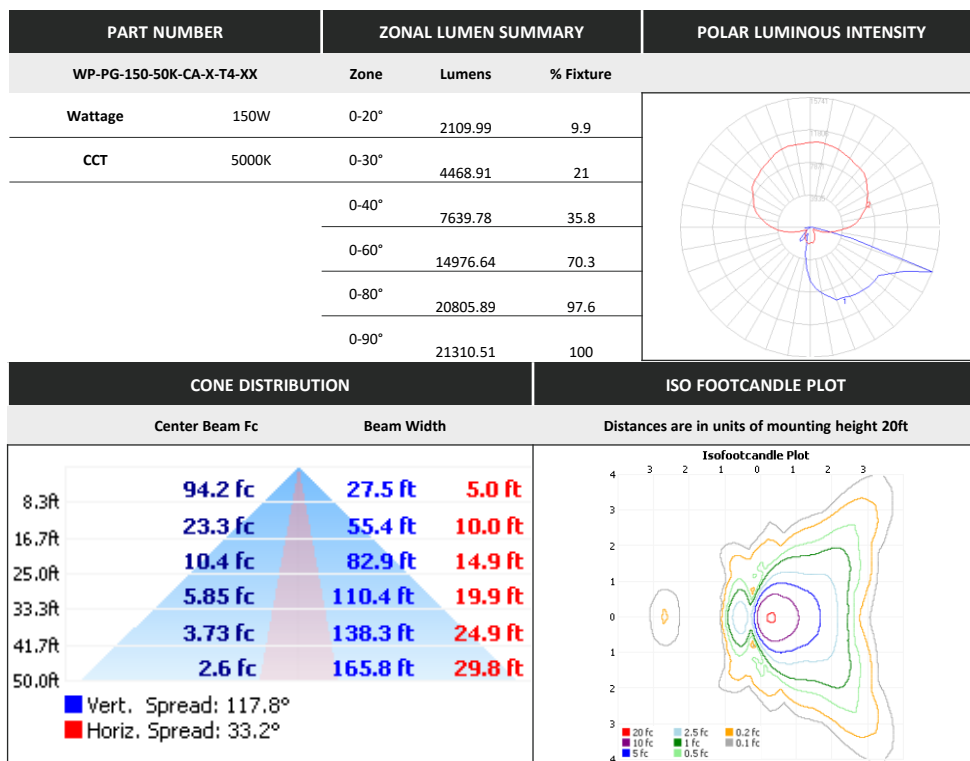

OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable

OVERVIEW



Innovative Design

- Aluminum die cast housing and fins for better heat dissipation
- High and efficient output



Multiple Options

- 40K and 50K CCT options
- Power Switchable
- Black, White & bronze finishes.



Protection

- Protected against dust ingress.
- Protected against water jets
- 6kV Surge Protector



Accessories

- photocell
- Integrated Emergency Battery Back up
- Plug in Motion sensor



Emergency backup battery



Photocell



Motion Sensor



Dark Sky

- Dark sky compliance with 3000K CCT and black finish
- Limited upward-directed light



Mounting Available

- Wall mount



Tests And Certifications

