

SAPPHIRE ET7069

OUTDOOR LED LIGHT

ACCENT LIGHT | 20-30-40W | 15°|24°|36°|50°|50°X20°

ET7069 is an LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. The miniature size makes its appearance unobtrusive. NPT 0.5" stem with choices of mounting accessories allow installation on hard surfaces. It is 0-10V dimming compatible.

Application: Landscape | Architectural | Deck & patio | Pools & Security

eralux®

DATE	QTY	ACC. QTY	TYPE
PROJECT			
PN			
ACCESSORY PN			
NOTES			



DYNAMIC MENU

Order Information	Page 2
Dimensions	Page 2
Overview	Page 4

[Install Instruction link](#)

SPECIFICATIONS

Input Voltage	120V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming	TRIAC Dimming
CRI	80 CRI
CCT	27K 30K 40K 50K
Efficacy	~60 lm/W
Power	15 21 28 42W
Ambient Temperature Range	-20°C to 45°C
Mounting Options	Ground Wall mount Junction Box
Mounting Brackets	Ground spike Round wall plate Junction Box
Fixture Finish	White Black Silver
Distribution	15° 25° 45° 60° 30°X10°
Protection	IP65; Water and dust resistance
Lens Material	Polycarbonate Lens



PRODUCT FEATURES



PRODUCT CERTIFICATIONS



SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L85 at 50,000 hours

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

OUTDOOR LED LIGHT
ACCENT LIGHT | 20-30-40W | 15°|25°|45°|60°|30°X10°

ORDERING GUIDE

AE-OD-ET7069				-80			
AE-OD-ET7069	-C15	-27	-15	-80	-NS	-B	-KC
ERALUX Sapphire ET7069 outdoor accent light	15W 1176 lms	2700K	15°	80CRI	No Shroud	Black RAL9011	Bracket C
	-C21	-30	-25		-AS	-W	-J
	21W 1258 lms	3000K	25°		Angle Shroud	White RAL9016	Junction Box
	-C40	-45	-45		-OS	-S	-JS
	28W 1677 lms	4000K	45°		Straight Shroud	Silver RAL9006	Junction Box with ground stake
	-C28	-50	-60				
	42W 2516 lms	5000K	60°				
	-C42		-3010				
			H30°x V10°				

Fixture Family

Power

CCT

Distribution

CRI


Accessories

Finish

Mounting

DIMENSIONS

AE-OD-ET7069

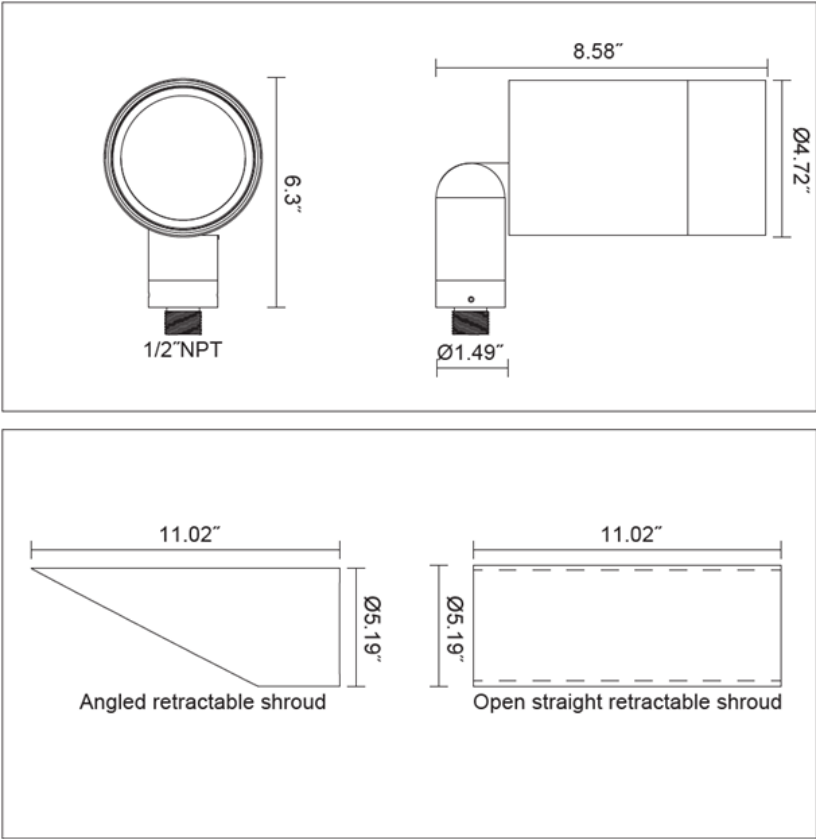

MOUNTING OPTIONS

INSTALLATION OPTIONS	
Surface/ Wall Mount	Description
 MTJ MOUNTING	• ø4-1/2" Round wall plate • Single fixture mounting hole • Black, White, Silver finish
 MTJ MOUNTING	
Ground Mount	Description
 MTJS MOUNTING	• 1-1/2" x 6-3/4" Ground spike with feed-through hole for wiring • ½" NPS Threaded Hubs • Black, White, Silver finish • Junction Box is included

OUTDOOR LED LIGHT

ACCENT LIGHT | 20-30-40W | 15°|24°|36°|50°|50°X20°

OVERVIEW



Innovative Design

- Heavy-duty, die-cast aluminum tiltable knuckle base utilizes tooth-lock adjustment with visual 90-degree adjustment (Outward/Inward).



Multiple Options

- 4 CCT Options are available ; 27,30,40,50
- 3 Different Finishes ; White, Silver, Black



Brackets

- Ground Stake
- Round wall plate
- Junction Box



Distribution

- Beam angle on field
15°|25°|36°|50°|50°x20°



Mountings Available

- Ground mount
- Wall mount
- Junction Box



Protection

- Protected against dust ingress.
- Protected against water jets



Tests And Certifications

