

SAPPHIRE ET7069

The ET7069 accent light pairs multiple beam patterns and retractable shrouds with 360° rotation and 180° tilt, in a miniature body that stays unobtrusive. 20W, 30W or 40W at 120-277V, IP65, with spike, wall plate and junction box brackets.

Landscape

Architectural

Deck & Patio

Pools & Security



Type: Date:
Project:
Catalog #:
Notes:



Key Specifications

Electrical

Input voltage	120-277V
Power factor	>0.9
THD	<20%
Dimming	TRIAC dimming
Power	20 30 40W

Optical

CRI	80 CRI
CCT	2700K • 3000K • 4000K • 5000K
Efficacy	~90-100lm/W
Distribution	15° 25° 35° 50° 50°X20°
Lens	Polycarbonate lens

Physical

Mounting	Ground • Wall mount • Junction box
Brackets	Spike • Wall plate • Junction box
Finish	White • Black • Silver
Ambient	-20°C to 45°C
Protection	IP65; water and dust resistance

Certifications

Listings	ETL • RoHS
----------	------------

System Warranty

5 years

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

Lumen Maintenance

L85 at 50000h

Rated for 85% initial lumen output at 50000h of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

Ordering Guide - Fixture

Assembled Catalog Number

[RESET](#)

AE-OD-ET7069

01 FIXTURE FAMILY



AE-OD-ET7069

ERALUX Sapphire ET7069 outdoor accent light

02 POWER

-C20

20W
2161lm

-C30

30W
2936lm

-C40

40W
3958lm

03 CCT



-27
2700K



-3
3000K



-4
4000K



-5
5000K

04 DISTRIBUTION



-15
15°



-25
25°



-35
35°



-50
50°



-5020
H50° x V20°

05 ACCESSORIES

-NS

No shroud

-AS

Angled
retractable
shroud

-SS

Straight
retractable
shroud

06 FINISH



-B
Black
RAL9011



-W
White
RAL9016



-S
Silver
RAL9006

07 MOUNTING



-MTC
Bracket C



-MTJ
Junction box




-MTJS
Junction box with
ground stake

Mounting options include ground spike, round wall plate and junction box. Compatible with TRIAC dimming.

Dimensions

AE-OD-ET7069

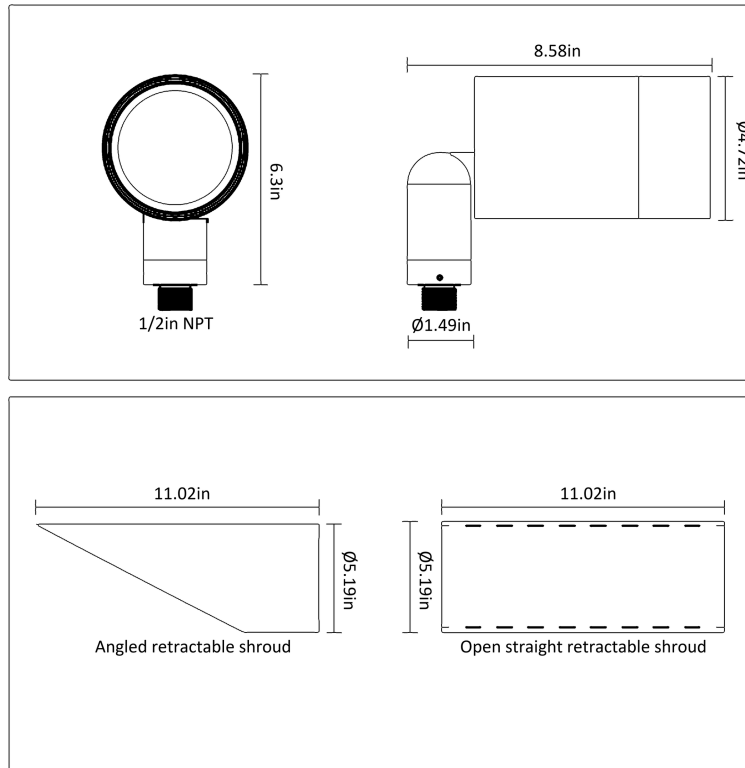

Fixture with 1/2in NPT stem; angled and open straight retractable shrouds. Dimensions in inches. Installation instructions: [Install Instruction Sapphire ET7069](#) · [Install Instruction ET7016-7066-7069 Installation guide](#)

Mounting Options



-MTC Bracket C



-MTJ Junction box



-MTJS Junction box
with ground stake

Surface / wall mount: $\varnothing$ 4-1/2in round wall plate · single fixture mounting hole · black, white, silver finish. **Ground mount:** 1-1/2in x 6-3/4in ground spike with feed-through hole for wiring · 1/2in NPS threaded hubs · black, white, silver finish · junction box is included.