


SB2

High Bay UFO

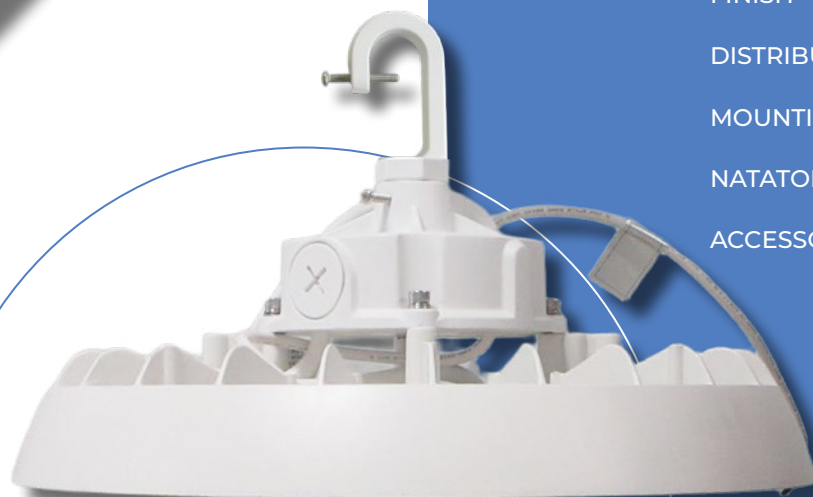

INPUT VOLTAGE

120 - 277/347 V

POWER & LUMENS

100/125/150 W | 15000/18750/22500 lm

150/200/240 W | 22500/30000/36000 lm

200/240/300 W | 30000/36000/45000 lm

CRI

80

DIMMING

0-10V

CCT

35K 40K 50K

FINISH

Black White

DISTRIBUTION

110°

MOUNTING OPTIONS

Hook | Pendant 3/4" NPT conduit

NATATORIUM

Frosted Lens and Stainless-Steel Hardware

ACCESSORIES AVAILABLE

Wire Guard

Polycarbonate Reflector and cover

Aluminium Reflector

EMBB

Motion Sensor

Metal Chain

