

SPT

Direct/Indirect Architectural Linear

INPUT VOLTAGE

120 -277/347 V

SIZE & POWER & LUMENS

2 ft	30 W	3929 lm
3 ft	40 W	5000 lm
4 ft	50 W	6257 lm
5 ft	60 W	7500 lm
6 ft	75 W	10012 lm
8 ft	100 W	12515 lm

CRI

80 (Optional: 90)

DIMMING


0-10 V: 10%, 1% (Optional)

TRIAC (Optional)


FINISH



ACOUSTIC PANEL FINISH



CUSTOM DESIGN & LENGTH LIT JOINERS





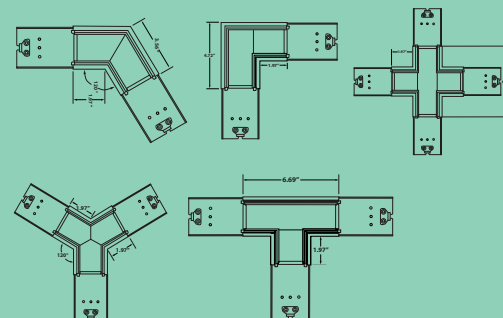


CCT SWITCHABLE



MOUNTING OPTIONS

Suspended Mount, Wall Mount,
Recessed T-Grid



eralux®