

JUPITER TRACK ST8

Type: Date:

Project:

Catalog #:

Notes:


Recessed and only 1in deep, this snap-in track runs Jupiter heads on two 48V circuits with 0-10V dimming. 4ft and 8ft lengths, black or white.

Retail

Commercial

Residential



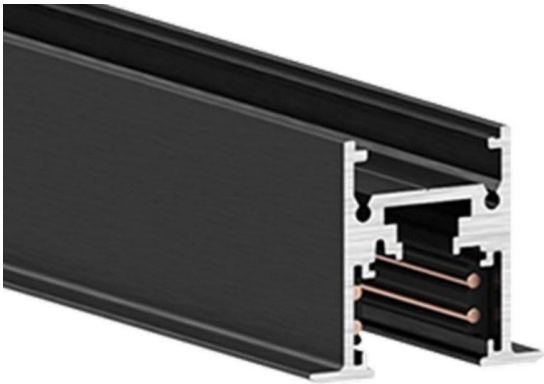

Key Specifications

Electrical

Supply	48V low voltage
Driver	ELG-75-48AB, ordered separately
Driver input	100-240/277V
Driver output	43.2-52.8V · 60W max
Dimming	0-10V

Compatibility

Track heads	Jupiter snap-in series
Mounting	Recessed
Circuits	Two circuit

Physical

Depth	1in
Profile	1.46in × 1.30in
Lengths	4ft · 8ft
Finish	Black · White
Accessories	Connectors · Feeds · Driver

Certifications

Listings	3-Yr Warranty · UL Certified
----------	------------------------------

System Warranty

3 years

Eralux will warrant defective drivers, LEDs and boards for 3 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

Lumen Maintenance

Not applicable

The track, connectors and power feeds carry no light source. Lumen maintenance is stated on each Jupiter track head's specification sheet.

Ordering Guide - Track

Assembled Catalog Number

[RESET](#)

9500

Catalog #:

01 TRACK SYSTEM



9500
ERALUX Jupiter snap-in track

02 LENGTH

-UL4
4ft track

-UL8
8ft track

03 FINISH

/B
Black Finish

/W2
White Finish

04 DEPTH


ST8
-ST8-E
1-inch Depth

The track carries no driver: order the ELG-75-48AB external driver from page 04. Connectors, power feeds, end caps and mounting accessories are ordered from pages 03 and 04.

Track Lengths

PART NO.	LENGTH
9500-UL4	4ft
9500-UL8	8ft

Track Profile

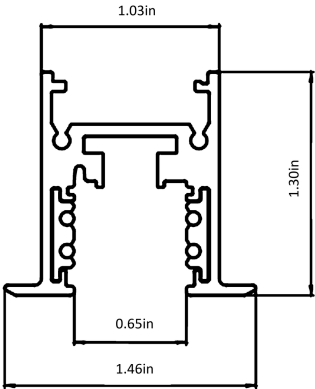

Accessory Ordering Guide

Connectors & Power Feeds

[RESET](#)

Catalog #:

01 COMPONENT



JP10001
I connector



JR10003
L connector



JP10015
End feed



JP10015R
End feed reverse

02 FINISH



-WHT
White



-BLK
Black

End Caps & Track Cover

[RESET](#)

Catalog #:

01 COMPONENT



JR10009
End cap



JP10027
Track cover, 8ft

02 FINISH



-WHT
White



-BLK
Black

All connectors come with housing; their dimensions and bills of material are on page 05. The reverse (left) end feed carries the R suffix. See page 06 for an example track configuration.


Accessory Dimensions

All dimensions in inches. Installation instructions: [Install Instruction link](#)

End Feed




POLARIZATION	ORDERING CODE	BOM
Standard (Right)	JP10015-WHT	9501-S-KR/W-E
	JP10015-BLK	9501-S-KR/B-E
Reverse (Left)	JP10015R-WHT	9501-S-KL/W-E
	JP10015R-BLK	9501-S-KL/B-E

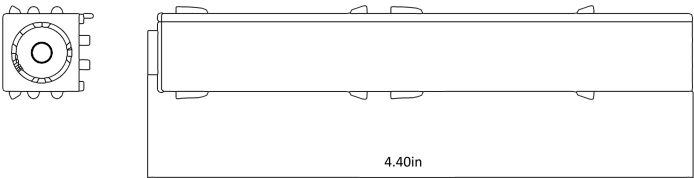


I Connector




ORDERING CODE	BOM
JP10001-WHT	9503-S-K/W-E · S-9500/423-LA
JP10001-BLK	9503-S-K/B-E · S-9500/423-LA

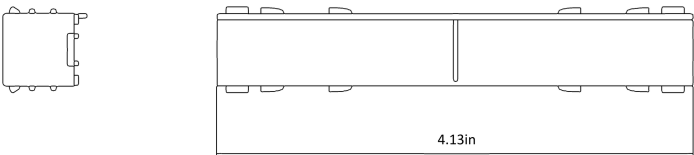

L Connector



ORDERING CODE	BOM
JR10003-WHT	9511-KE/W-E · S-9511/W2-ST8-E
JR10003-BLK	9511-KE/B-E · S-9511/B-ST8-E

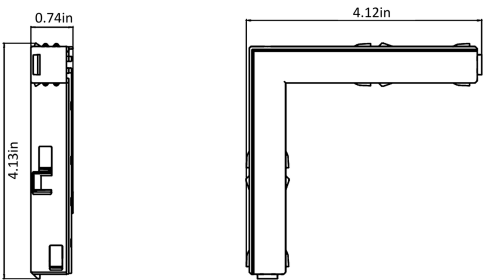


Track Configuration

End Caps & Track Cover



JR10009
End cap




JP10027
Track cover, 8ft

ORDERING CODE	BOM
JR10009-WHT	9504/ST8-W2
JR10009-BLK	9504/ST8-B
JP10027-WHT	S-9500-SE/W2-UL8
JP10027-BLK	S-9500-SE/B-UL8

Track Configuration


An example configuration; each label is the bill-of-material code of that component.

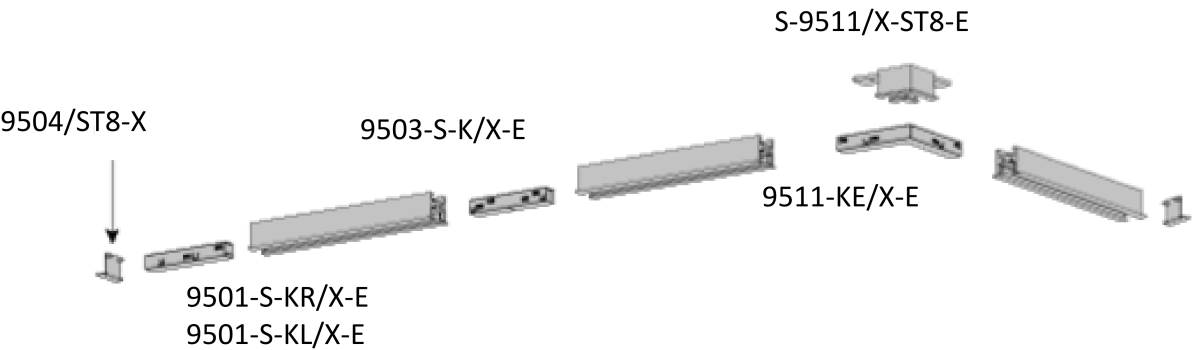


Jupiter Track - All Models



ST6
1in depth
Surface or suspended



ST2
2in depth
Surface or suspended



ST8
1in depth
Recessed



ST18
2in depth
Recessed